


# MIG-23 FLIPPER

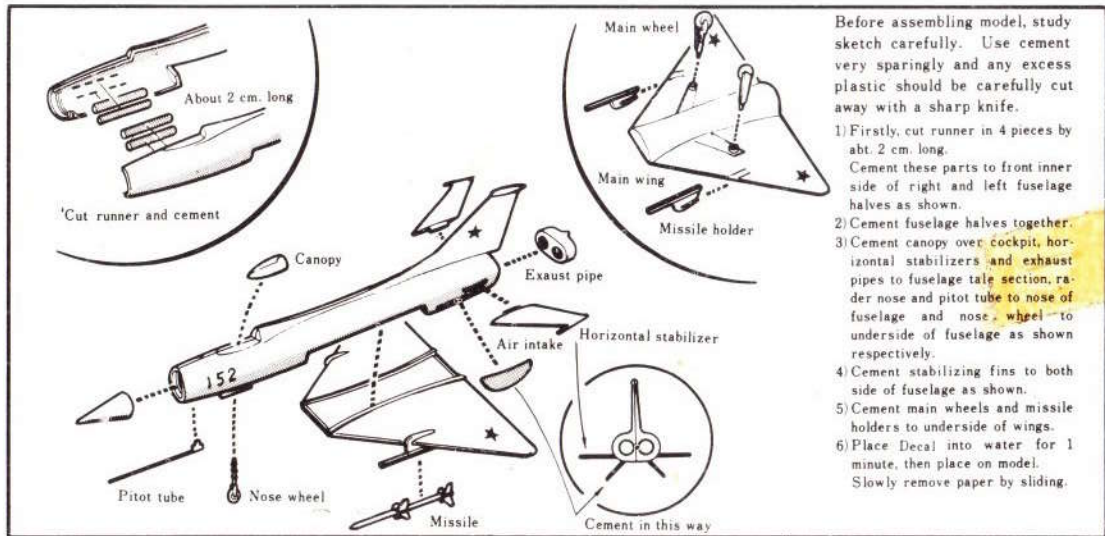

Before assembling model, study sketch carefully. Use cement very sparingly and any excess plastic should be carefully cut away with a sharp knife.

- 1) Firstly, cut runner in 4 pieces by abt. 2 cm. long. Cement these parts to front inner side of right and left fuselage halves as shown.
- 2) Cement fuselage halves together.
- 3) Cement canopy over cockpit, horizontal stabilizers and exhaust pipes to fuselage tail section, radar nose and pitot tube to nose of fuselage and nose wheel to underside of fuselage as shown respectively.
- 4) Cement stabilizing fins to both side of fuselage as shown.
- 5) Cement main wheels and missile holders to underside of wings.
- 6) Place Decal into water for 1 minute, then place on model. Slowly remove paper by sliding.