



48075

P-40E, K. N

WARHAWKS!

PART ONE



Suggested Kit: Mauve/ AMT Warhawk Family.



A/C 1

A/C Type	P-40K-5.
Pilot & Unit	1st Lt. Charles J. White.
Locale & Date	Yunnanyi, China, 1944.
Camouflage & Markings	Heavily weathered US equivalent Dark Earth and Dark Green upper surfaces, US equivalent Sky Gray undersurfaces. Inner lip of the radiator chin should be touched up with Red paint.
Remarks	Unknown if nose art on both sides.

A/C 2

A/C Type	P-40N-20.
Pilot & Unit	1st Lt. Don Lopez.
Locale & Date	Kweilin, China, 1944.
Camouflage & Markings	Weathered US Olive Drab upper surfaces, Neutral Gray undersurfaces. White spinner cap. Wing and stabilizer scallops in Green 42 possibly applied to this A/C. See plan view for suggested application.
Remarks	Unknown if nose art is on both sides.




A/C 3

A/C Type	P-40E
Pilot & Unit	Major Ed Rector
Locale & Date	Kweilin, China, July 1942
Camouflage & Markings	Heavily weathered US equivalent Dark Earth and Dark Green upper surfaces, US equivalent Sky Gray undersurfaces.

A/C 4

A/C Type	P-40K
Pilot & Unit	Captain J. Roy Brown
Locale & Date	China, Spring 1944
Camouflage & Markings	Heavily weathered US equivalent Dark Earth and Dark Green upper surfaces, US equivalent Sky Gray undersurfaces. White spinner tip.
Remarks	Unknown if nose art on both sides.

P-40E, K, N WARHAWKS! PART ONE

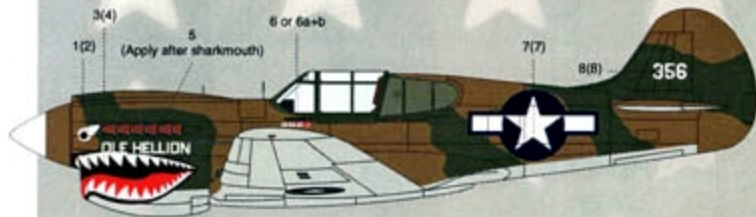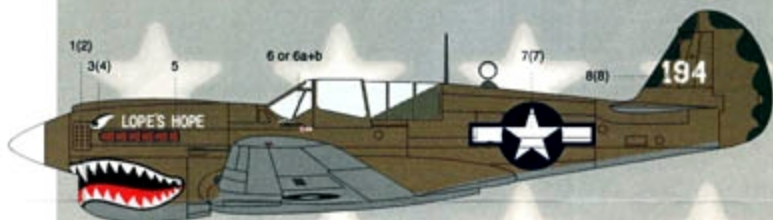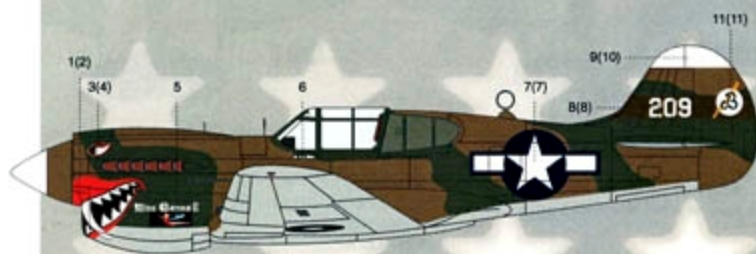

Parts 2 and 3 covering these interesting A/C will be released very soon. Stay tuned to our web site for further notice.

Catch us on the net!



www.AeroMaster.com




Typical two-color upper surface camouflage and insignia placement - all versions.

Recommended Kits:

Mauve/ AMT Warhawk Family.



A/C 3 Uses the shown insignia on upper left and lower right ONLY.

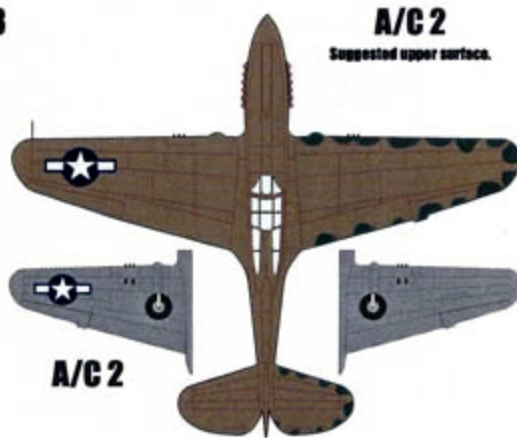

Typical OD/Neutral Gray camouflage and insignia placement - all versions.

References:

- Osprey P-40 Aces of the CBI, by Carl Molesworth.
- S/S P-40 Walkaround.
- S/S P-40 in Action.

P-40E, K, N WARHAWKS! PART ONE



EAGLE STRIKE
Productions

12982 SW 132nd Ave. Miami, FL. 33186
U.S.A.

Ph: (786) 293-6859, Fax: (786) 293-9286.

COLOR SCHEMES



Decaling: Apply decals only to a glossy surface.

1. With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
2. Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow the setting solution to dry for about 3-5 minutes.
4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do DO NOT TOUCH THE DECAL, after this process until it is totally dry, preferably overnight.
5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).