

EAGLE STRIKE



48076

P-40K. N WARHAWKS! PART TWO

P-40 WARHAWK



Suggested Kit: Mauve / AMT Warhawk Family.

48076



P-40K, N

WAR HAWKS!

PART TWO


A/C 1

A/C Type	P-40K
Pilot & Unit	1st Lt. Joseph Griffin
Locale & Date	China, Spring 1943
Camouflage & Markings	Heavily weathered US equivalent Dark Earth and Dark Green uppersurfaces, US equivalent Sky Grey undersurfaces.




A/C 2

A/C Type	P-40N
Pilot & Unit	1st Lt. Carl Hardy Jr.
Locale & Date	China, Summer 1944
Camouflage & Markings	Weathered standard Olive Drab and Neutral Gray camouflage. Note overpainted serial number on fin and rudder. White spinner tip.

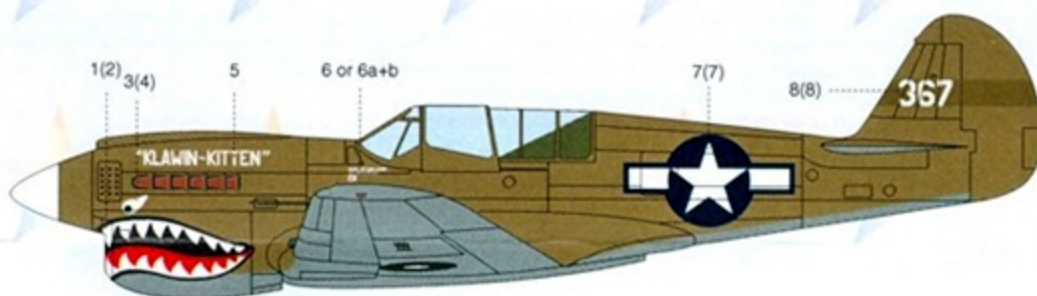

A/C 3


A/C Type	P-40N
Pilot & Unit	Lt. Fred F. Burgett
Locale & Date	Yunnanyi, China, 1944
Camouflage & Markings	Weathered US Olive Drab uppersurfaces, Neutral Gray undersurfaces. White spinner cap with Red tip. Note overpainted serial number.

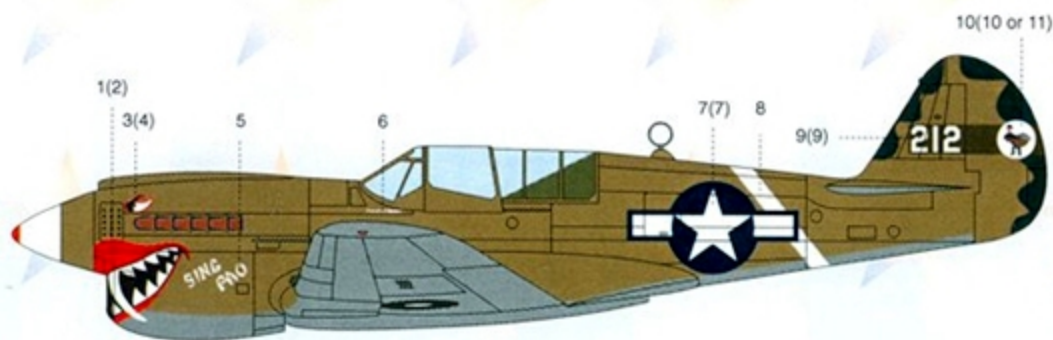


A/C 4

A/C Type	P-40N-5
Pilot & Unit	Captain Wang Kuang Fu
Locale & Date	Laohokow, China, 1945
Camouflage & Markings	Weathered standard Olive Drab and Neutral Gray camouflage.



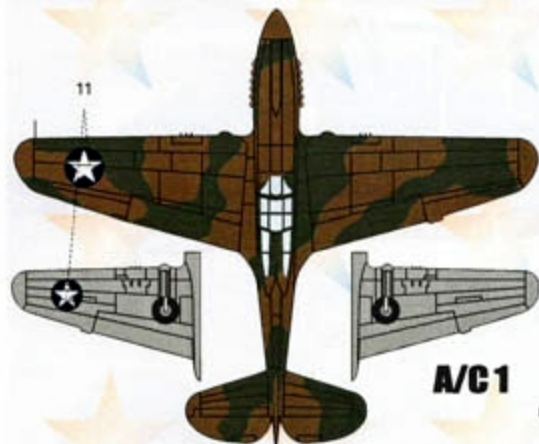

Typical two-color upper surface camouflage and insignia placement - all versions.

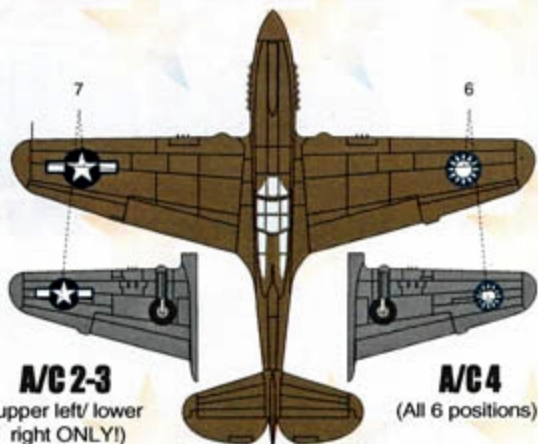

(upper left/ lower right ONLY!)

Typical OD/Neutral Gray camouflage and insignia placement - all versions.

Recommended Kits:

Mauve/ AMT Warhawk Family.

References:

- Osprey P-40 Aces of the CBI, by Carl Molesworth.
- S/S P-40 Walkaround
- S/S P-40 in Action

P-40K. N WARHAWKS! PART TWO



EAGLE STRIKE
Productions

12982 SW 132nd Ave. Miami, FL. 33186
U.S.A.
Ph: (786) 293-6859, Fax: (786) 293-9286.

COLOR SCHEMES



U.S. EQUIVALENT
RAF SKY GRAY



U.S. NEUTRAL
GRAY 43



U.S. GREEN 43



FADED OLIVE
DRAB



U.S. EQUIVALENT
RAF OX EARTH



U.S. EQUIVALENT
RAF OX GREEN

Decaling: Apply decals only to a glossy surface.

1. With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
2. Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow the setting solution to dry for about 3-5 minutes.
4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do DO NOT TOUCH THE DECAL, after this process until it is totally dry, preferably overnight.
5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).