


48th Scale  
NO.  
48-54



FOREIGN F 5'S  
**MICROSCALE DECAL**  
BY KRASEL INDUSTRIES, INC., SANTA ANA, CA. 92705

**AIRCRAFT**

RECOMMENDED KITS: MONOGRAM F-5E, TESTORS F-5A

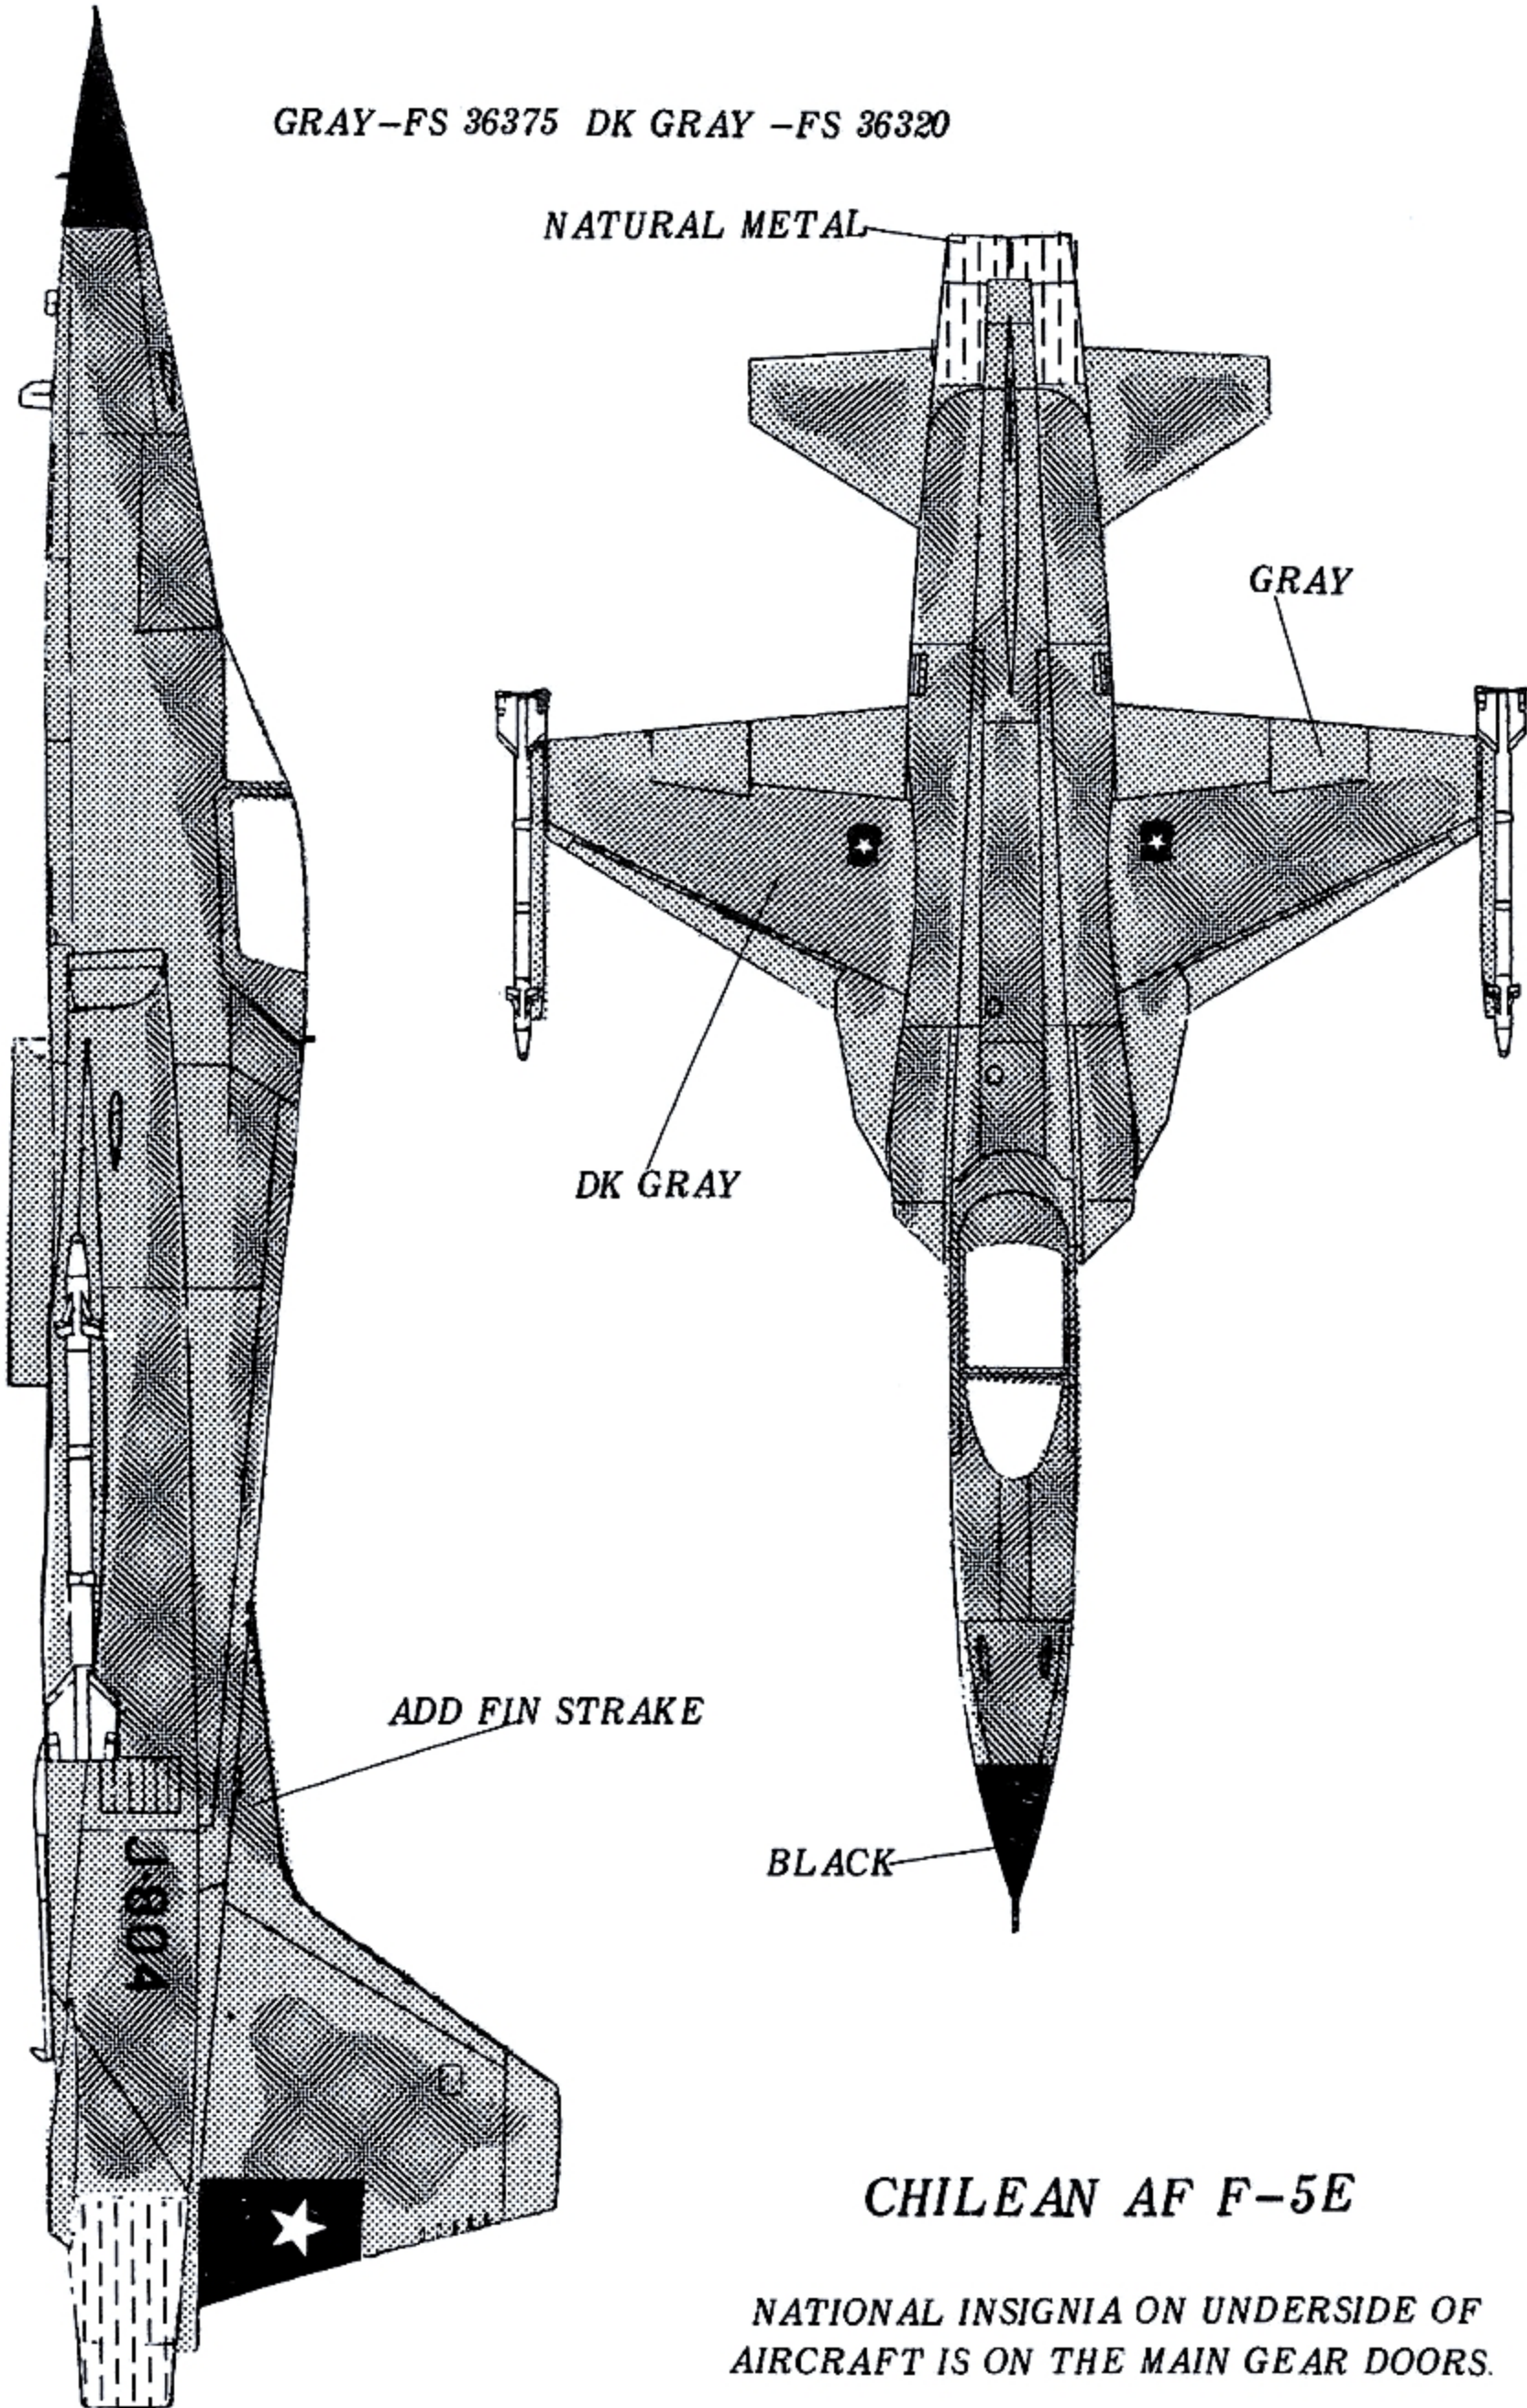


### CHILEAN AF F-5E


NATIONAL INSIGNIA ON UNDERSIDE OF AIRCRAFT IS ON THE MAIN GEAR DOORS.

RIGHT SIDE IDENTICAL TO LEFT

MISSILE IS WHITE OVERALL.  
YELLOW RED

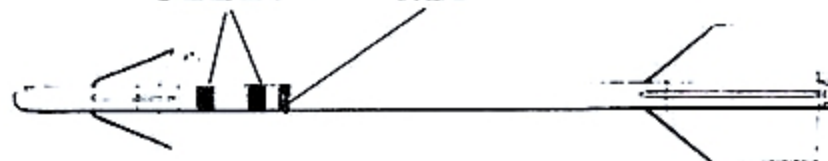


DECAL PLACEMENT FOR SIDEWINDER MISSILES

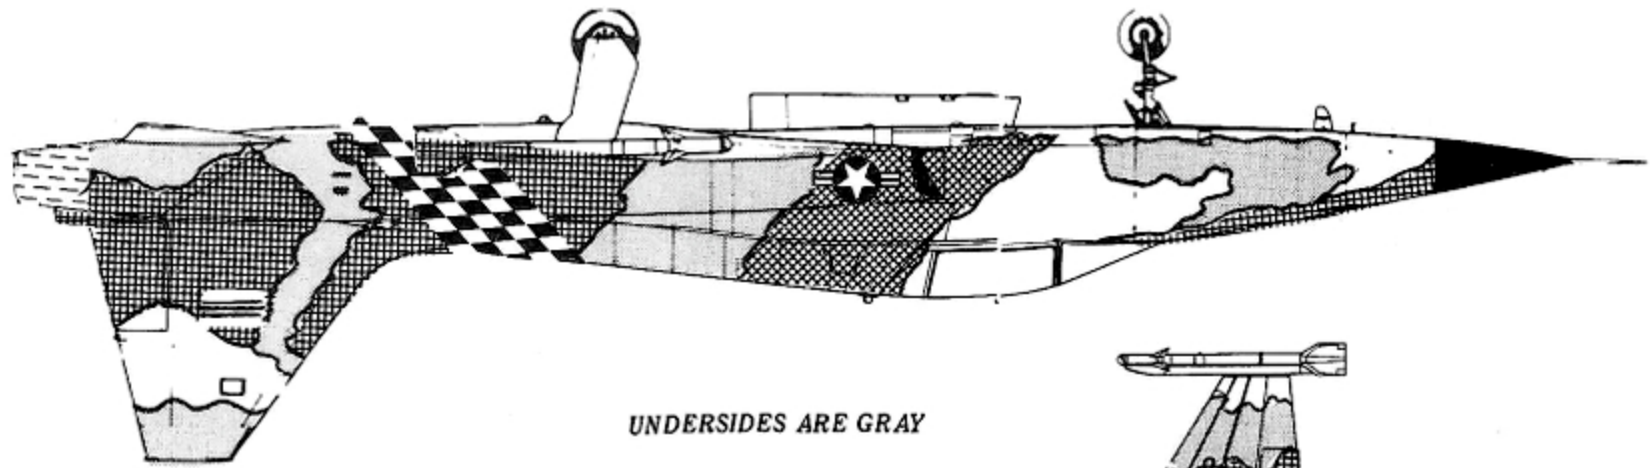

UNDERSIDES ARE GRAY



**REPUBLIC OF VIET NAM F-5A**

TAN-FS 30219 GREEN FS 34102  
 DK GREEN FS 34079 GRAY FS 36622

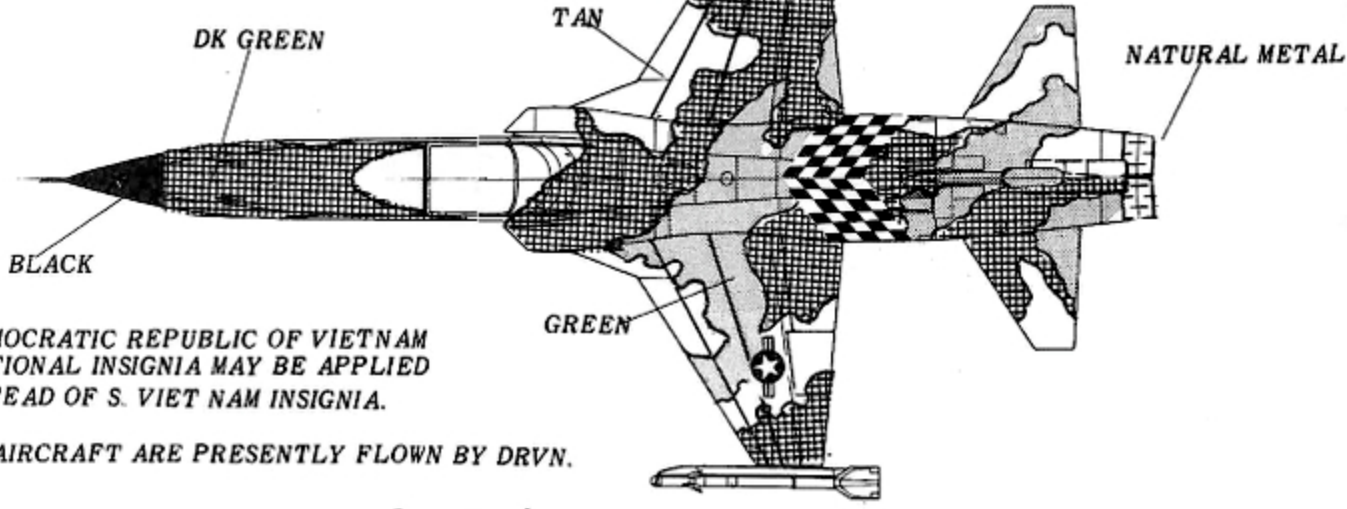

DEMOCRATIC REPUBLIC OF VIETNAM  
 NATIONAL INSIGNIA MAY BE APPLIED  
 INSTEAD OF S. VIET NAM INSIGNIA.


F-5A AIRCRAFT ARE PRESENTLY FLOWN BY DRVN.

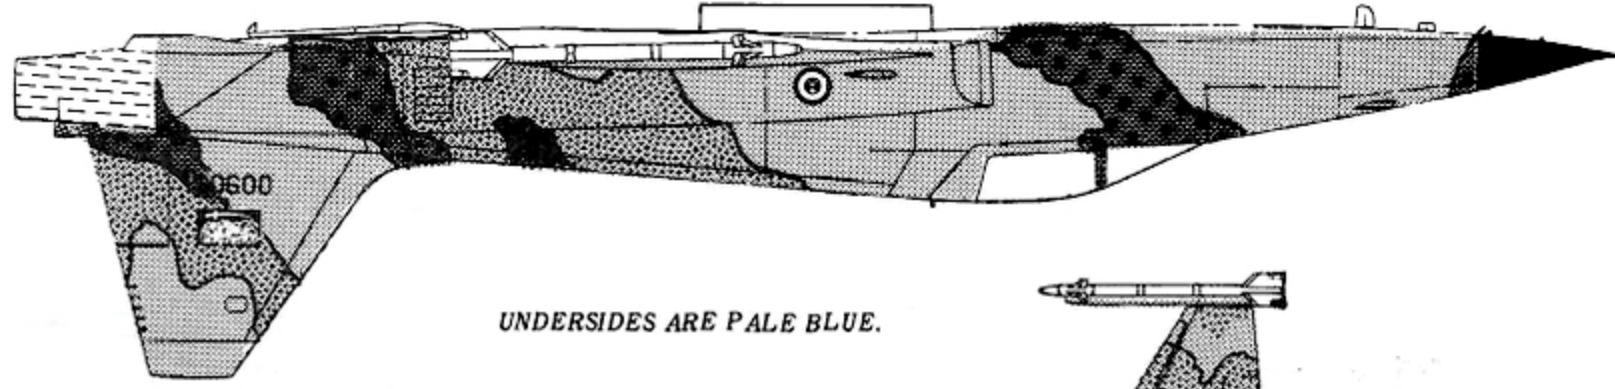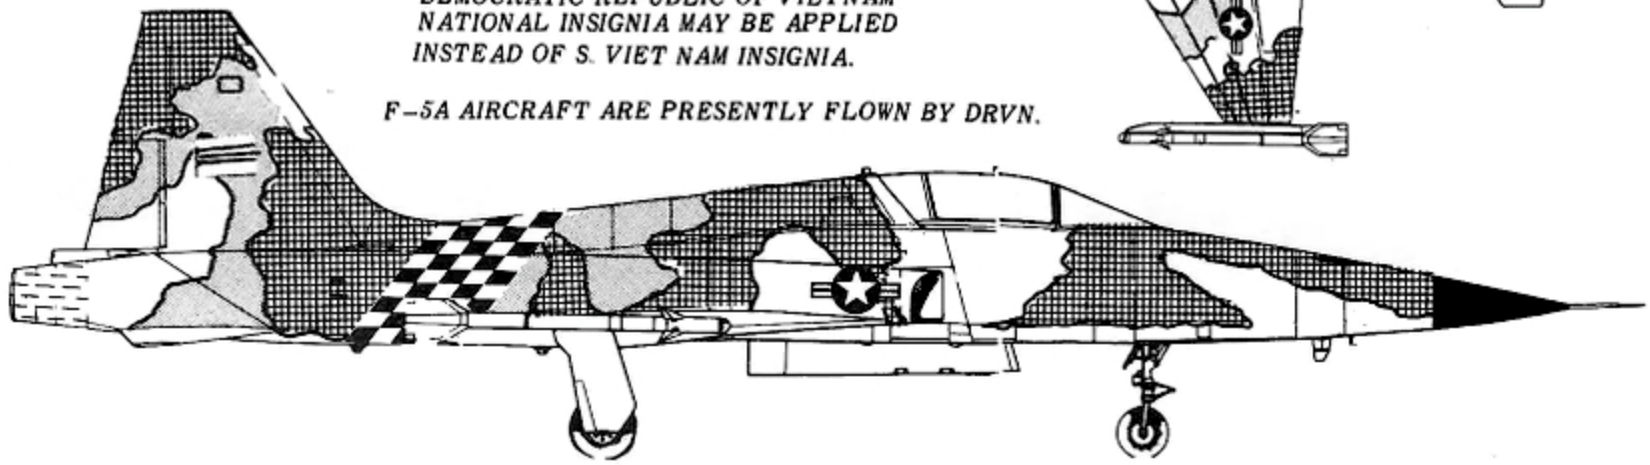

UNDERSIDES ARE PALE BLUE.


**ROYAL SAUDI F-5E**

GREEN-FS 34092 BROWN-FS 30140 TAN-FS 30400

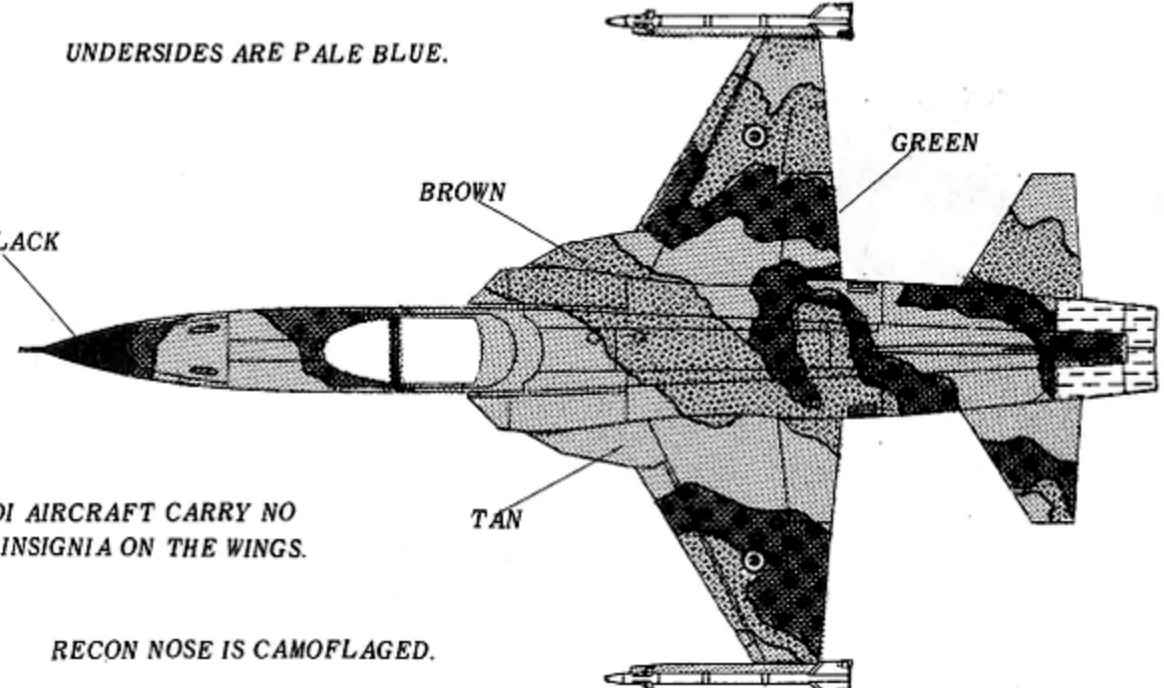

SOME SAUDI AIRCRAFT CARRY NO  
 NATIONAL INSIGNIA ON THE WINGS.

RECON NOSE IS CAMOFLAGED.

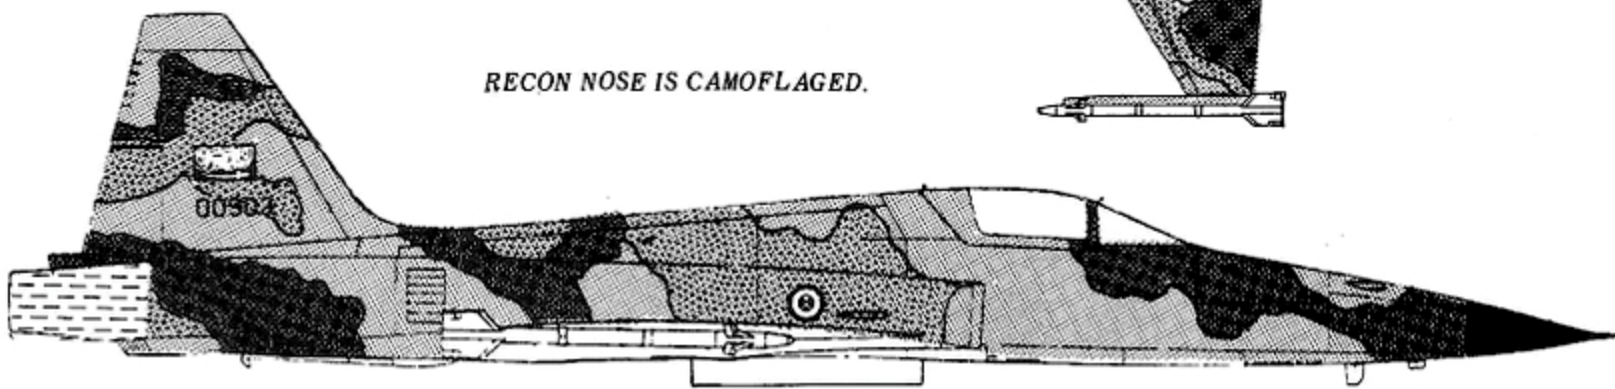

**48th Scale**

NO.

48-54


**FOREIGN F 5'S**  
**MICROSCALE DECAL**

BY KRASEL INDUSTRIES, INC., SANTA ANA, CA. 92705


**AIRCRAFT****\$2.50**
**REPUBLIC OF THE PHILLIPINES F-5A**

LT GRAY

RIGHT SIDE IDENTICAL TO LEFT

OVERALL NATURAL METAL

BLACK ANTI GLARE

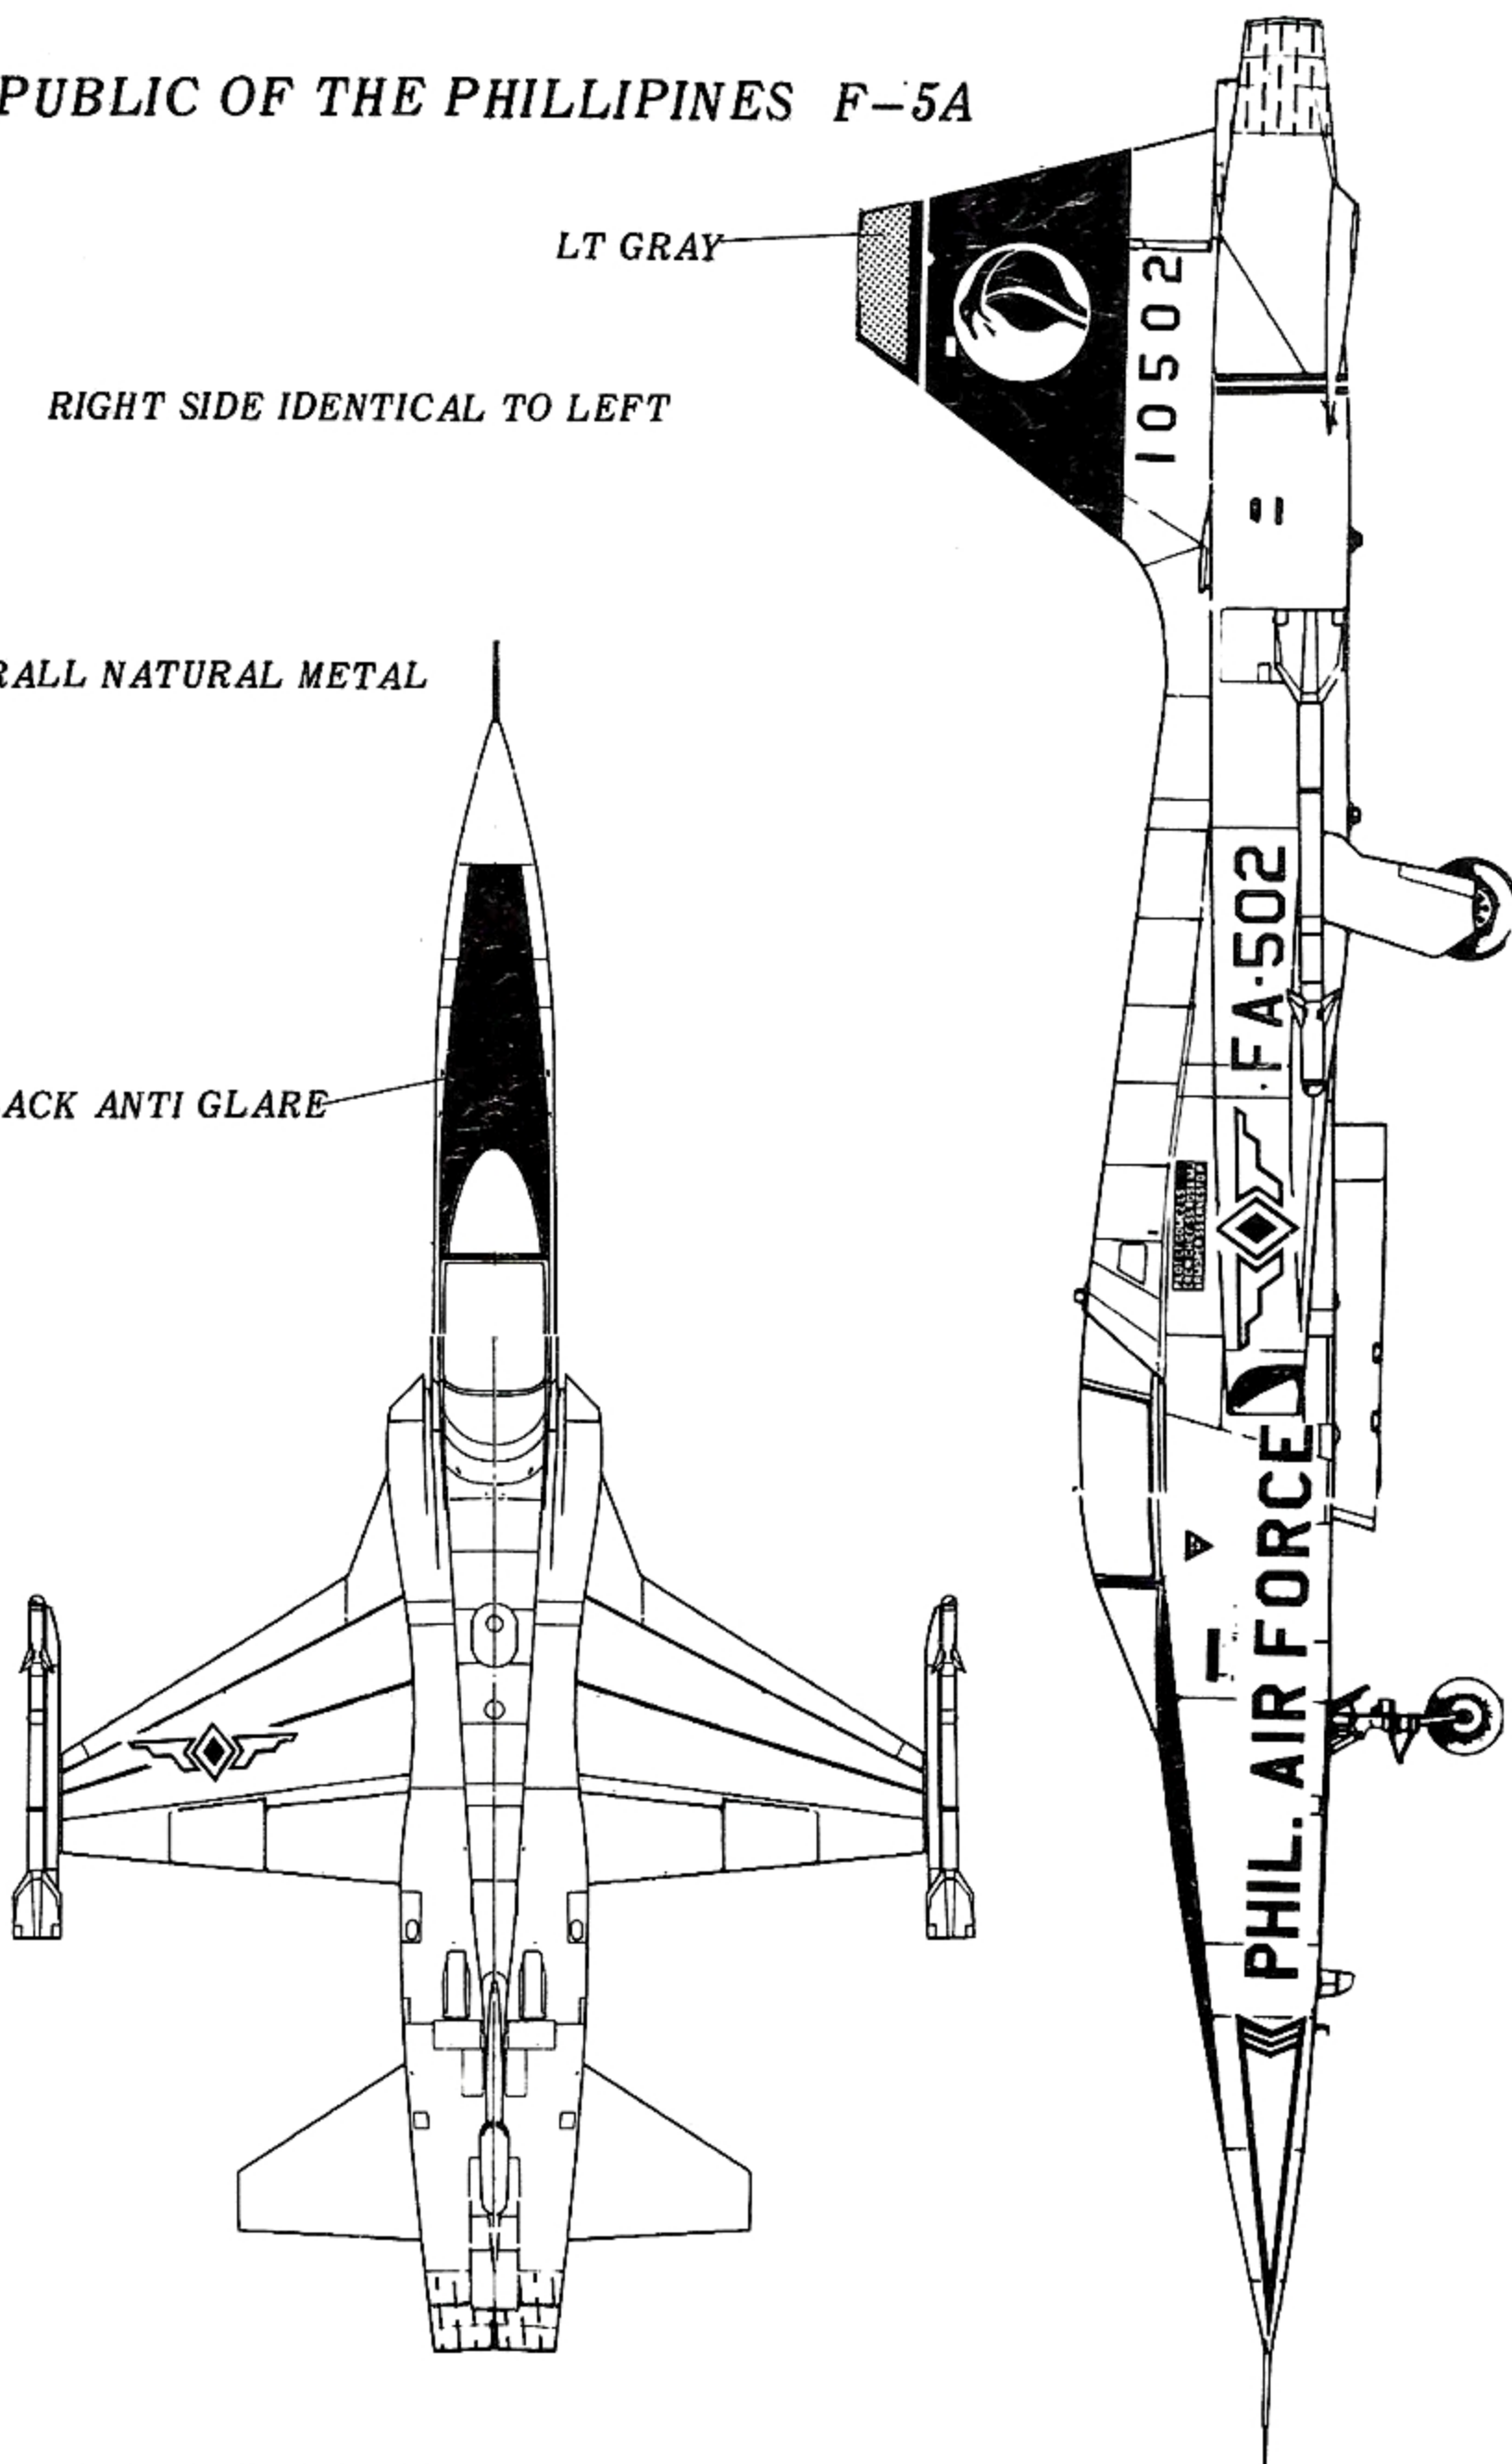
**The MICRO SCALE DECAL SYSTEM**


1. Surface to be decalced must have a smooth, glossy, painted finish. (Do not apply decals to unpainted surfaces or they will not adhere.) To obtain this surface either paint the model with glossy paints or spray MICRO GLOSS over matte-finish paint. IMPORTANT: Spray MICRO GLOSS over entire model or uneven patches will appear when the flat finish is added later. Allow paint to dry thoroughly.
2. For best results, surface to be decalced should be horizontal. A small vise is helpful here, or a box can be made into a jig to allow the model to lay on its side.
3. Cut each decal subject from the sheet only as needed. **DO NOT** cut clear film away from design. Using tweezers, dip decal completely into water then remove and allow decal adhesive to soften. About one minute should be sufficient.
4. While adhesive is softening use a soft, medium-size brush, a No. 7 red sable water color brush is ideal, and wet the area to be decalced with a few drops of MICRO SET (Blue label). This contains a wetting agent and helps eliminate tiny air bubbles.
5. Holding the decal paper with tweezers, use the brush to slide the loosened decal into the MICRO SET on the model.
6. Now place a few drops of MICRO SOL (Red label) directly onto the decal and position the decal exactly where it is to remain.

7. The MICRO SOL will soften the decal and allow it to conform exactly to the surface beneath. DURING THIS PROCESS THE DECAL WILL WRINKLE AND DISTORT. DO NOT TOUCH IT! THIS IS NATURAL AND AN IMPORTANT PART OF THE SYSTEM! As the decal dries it will flatten-out and lay down. When finally dry there will be no distortion and the decal will be permanently bonded to the paint beneath. Actual drying time will vary according to temperature and humidity.
8. When decal is dry, examine it for any air bubbles. If any are found, puncture them with a sharp needle and put a drop of MICRO SOL over the bubble and allow to dry.
9. Carefully examine the clear film to be sure no silvering has appeared. If any is present, puncture the film several times with a sharp needle and apply MICRO SOL. The silvering should vanish as the SOL touches it.
10. After the decals have dried for several hours, carefully wash the decal adhesive from the entire model.
11. After the decals have dried for at least 12 hours, complete the model by spraying with either MICRO FLAT or MICRO GLOSS, depending on the sheen desired on the finished model.

10502 PHIL. AIR FORCE 10502



PHIL. AIR FORCE

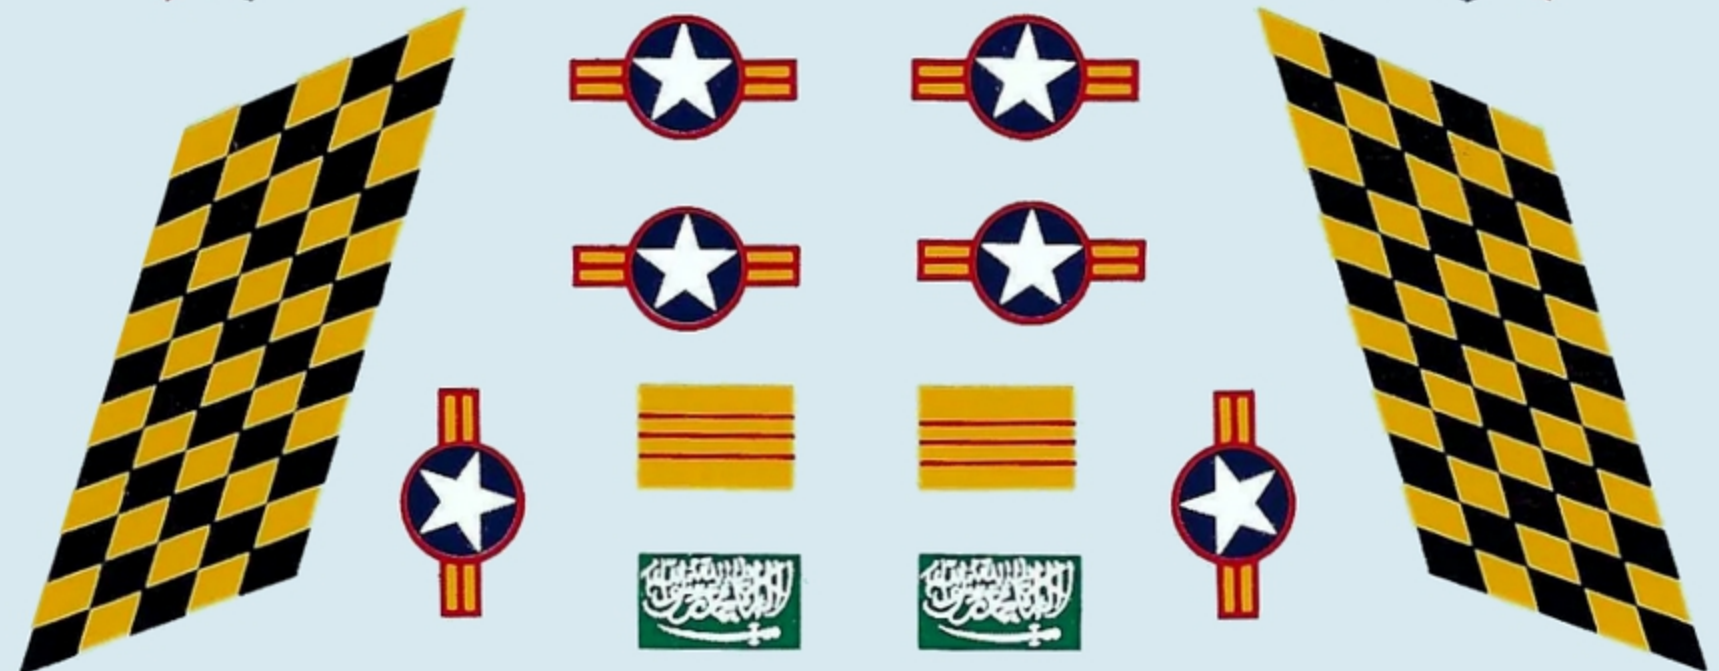

J-804

J-804

