

### 



#### EASY ASSEMBLY AUTHENTIC KIT



cyanoacrylate glue 强力胶



weight 配重



make hole 钻孔



cut / remove 切除



option 选择



no cement 不涂胶水



decal





The way to apply the decals


- Cut off the decal from the decal paper and put it into the warm water 40? for 10 seconds.
- 2. Take the decal from the water and put it on a piece of clean cloth.
- 3.Remove the decal slowly from the paper to the targeted location by a wet finger.
- 4.Use a piece of dry and soft cloth to press it gently on the decal until it getting dry and no bubble existing.

#### 水贴纸的使用方法:


- 一.把相关的印花从水贴纸上剪下,放入40℃左右的 温水中浸10秒。
- 二. 然后将印花放在干净的布上。
- 三. 拿上印花纸板,手指蘸水将印花移到适当的位置。 四. 用软干布轻压印花直至水干,气泡消失。

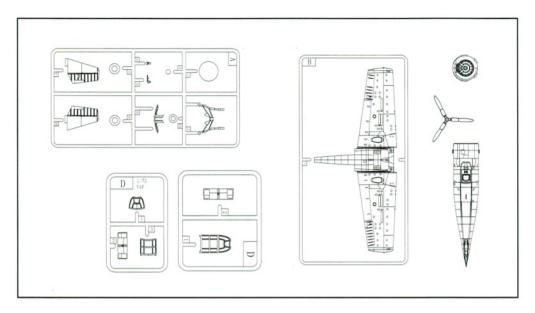

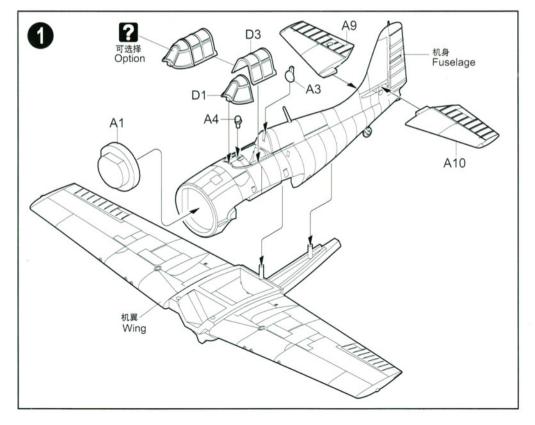


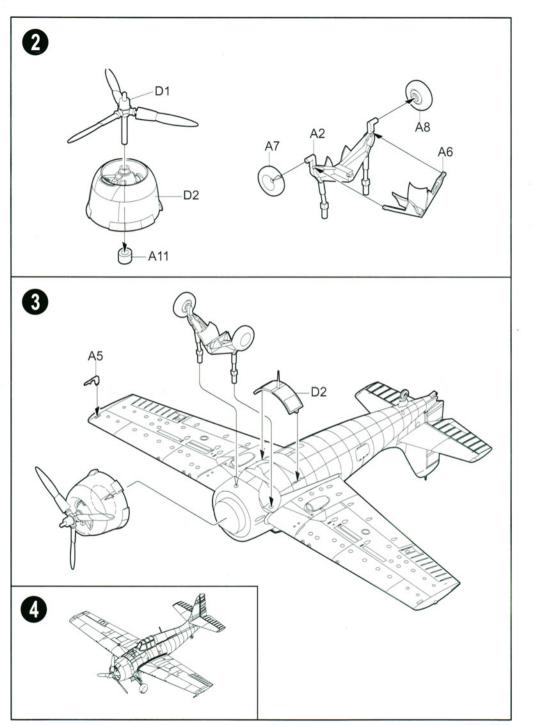

# VF-41 USS RANGER Atlantic 1941

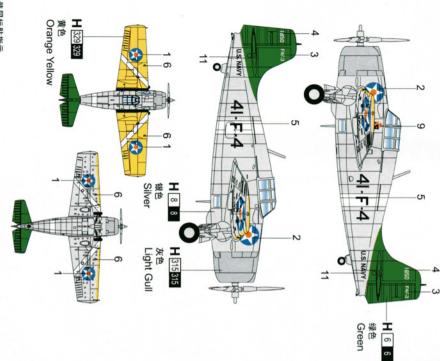

## VF-3 aboard USS LEXINGTON

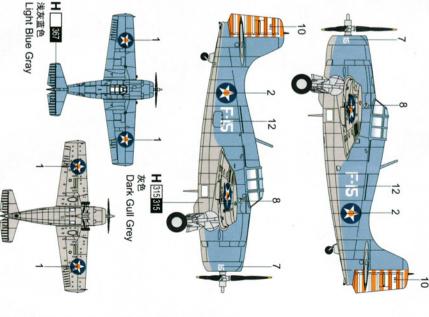

涂装同标贴指示 Painting & Marking guide

H X GUNZE SANGYO AQVEOUS HOBBY COLOUR X GU

X GUNZE SANGYO MR.COLOUR