




48107



SKYRAIDERS

Pt. II

SKYRAIDERS

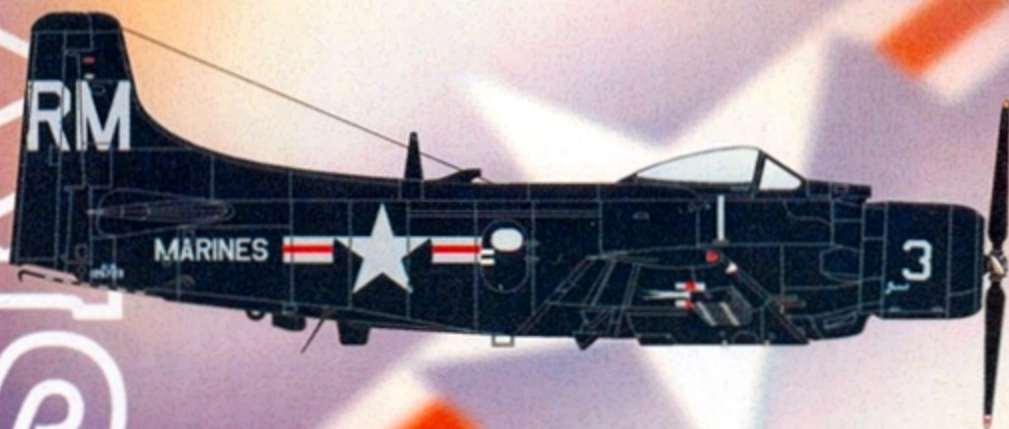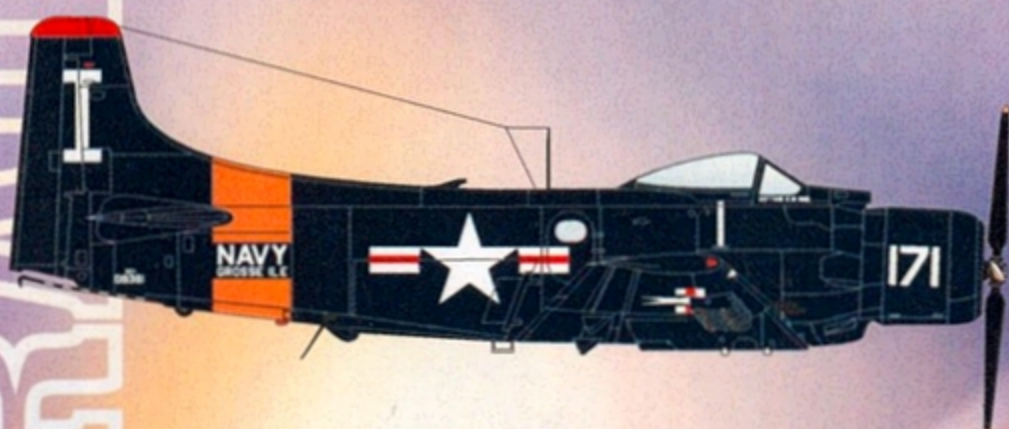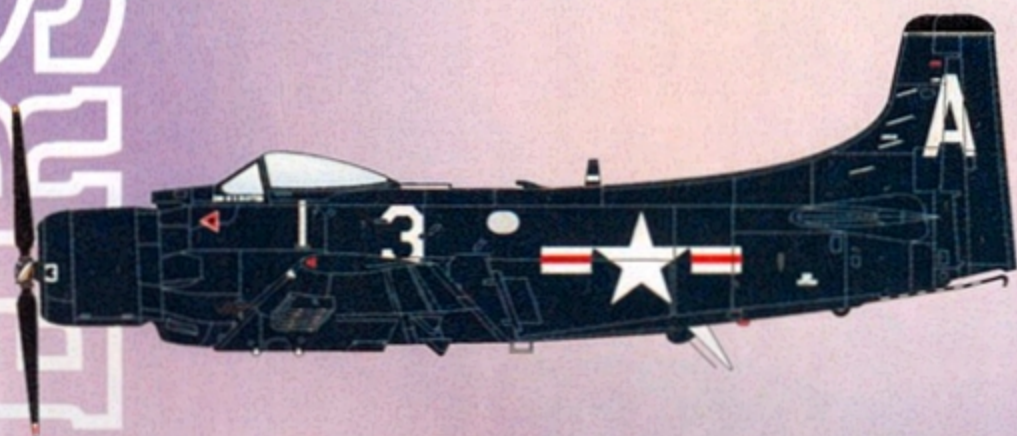


Suggested Kit: Tamiya/Monogram A-1H Skyraider.




SKYRAIDERS

Pt. II


AD-2Q Skyraider. VF-152, San Francisco, October 1949. Overall Gloss Sea Blue, Black propeller and fin tip. Paint fin tip Black, then trim with decal 12 & 13. Modeller must add upper scoop, fuselage windows, right side door and lower antenna(?). A/C flown by Ensign W. B. Whitten.

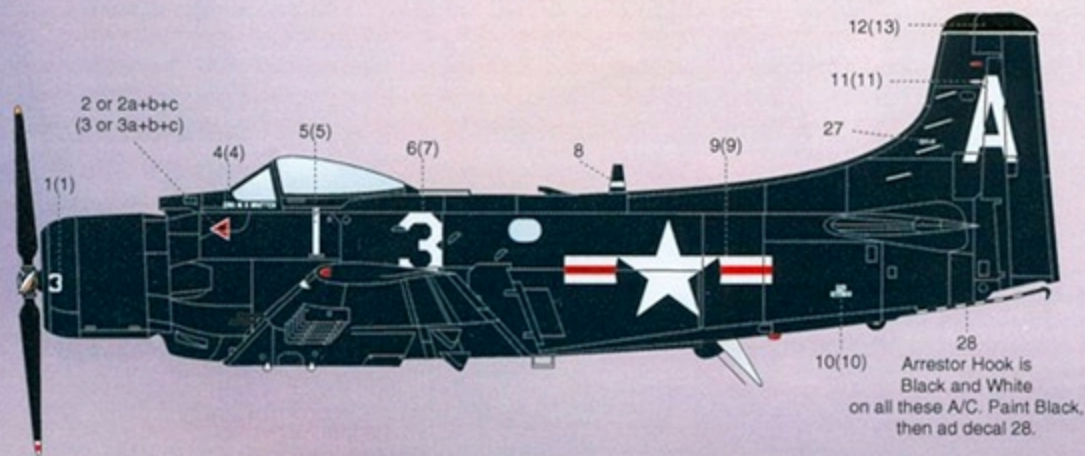



AD-1Q Skyraider. based at US Naval Station Grosse Ile, early 1950. Overall Gloss Sea Blue with Red fin tip. Black propeller and orange fuselage band. Modeller must add upper scoop and fuselage door/windows.

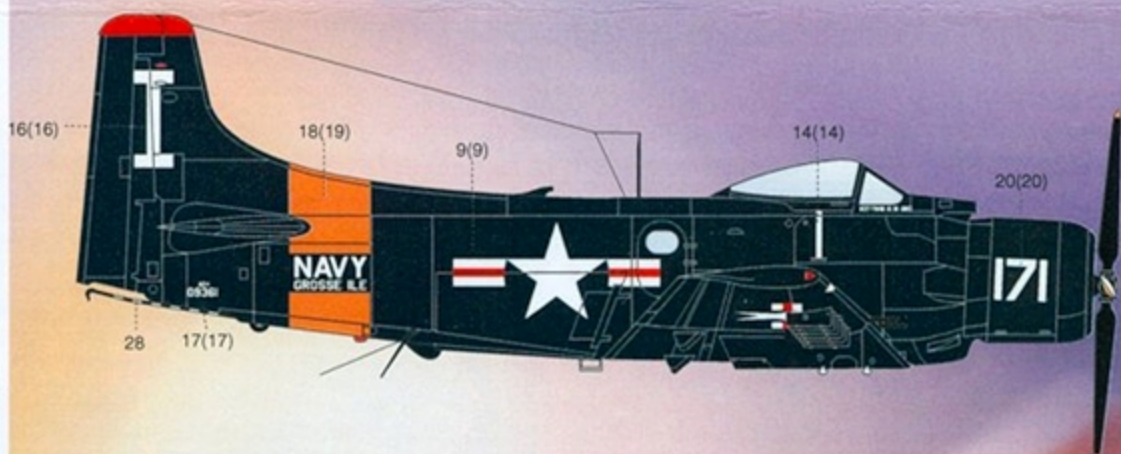

A Korean Veteran, this AD-4N Skyraider was based at K-16 Korea during February, 1954. It was painted overall Gloss Sea Blue with Gray-ed out insignias, numbers & codes. Notice door, scoop, belly antennas and lack of Air brakes. Modeller must modify.

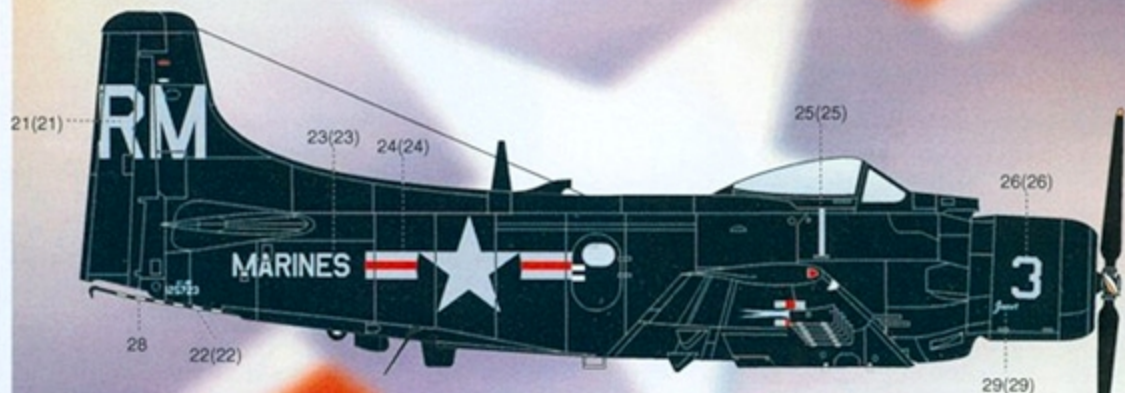

SKYRAIDERS SKYRAIDERS SKYRAIDERS SKYRAIDERS

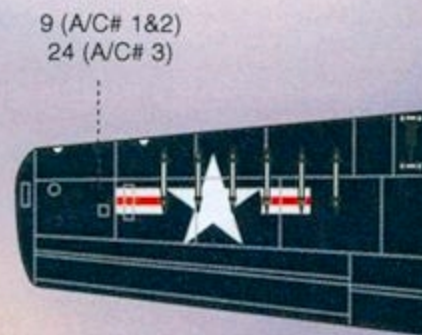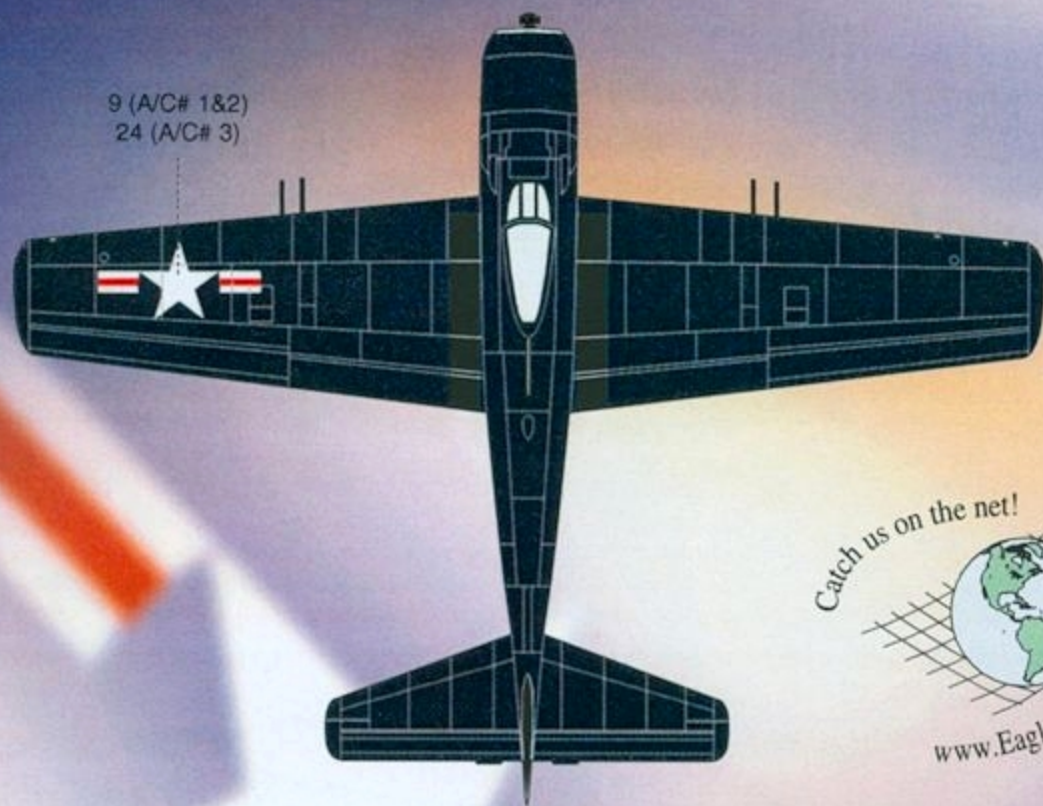

Catch us on the net!



www.EagleStrikeProductions.com

Apply insignia prior to attaching Rocket Racks.

Recommended Kits:

- Tamiya/Monogram A-1H Skyraider.

References:

- Warpaint Series No.18. Douglas SKYRAIDER, by Ken Wixey.

Decaling: Apply decals only to a glossy surface.

1. With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
2. Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow the setting solution to dry for about 3-5 minutes.
4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do **DO NOT TOUCH THE DECAL**, after this process until it is totally dry, preferably overnight.
5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).

12982 SW 132nd Ave. Miami, FL. 33186
U.S.A.
Ph: (786) 293-6859, Fax: (786) 293-9286.

**EAGLE STRIKE
Productions**