




48198

# Eyes in the Sky

RF-4B/C Phantoms Part II

Suggested Kit: Hasegawa RF-4 Family.

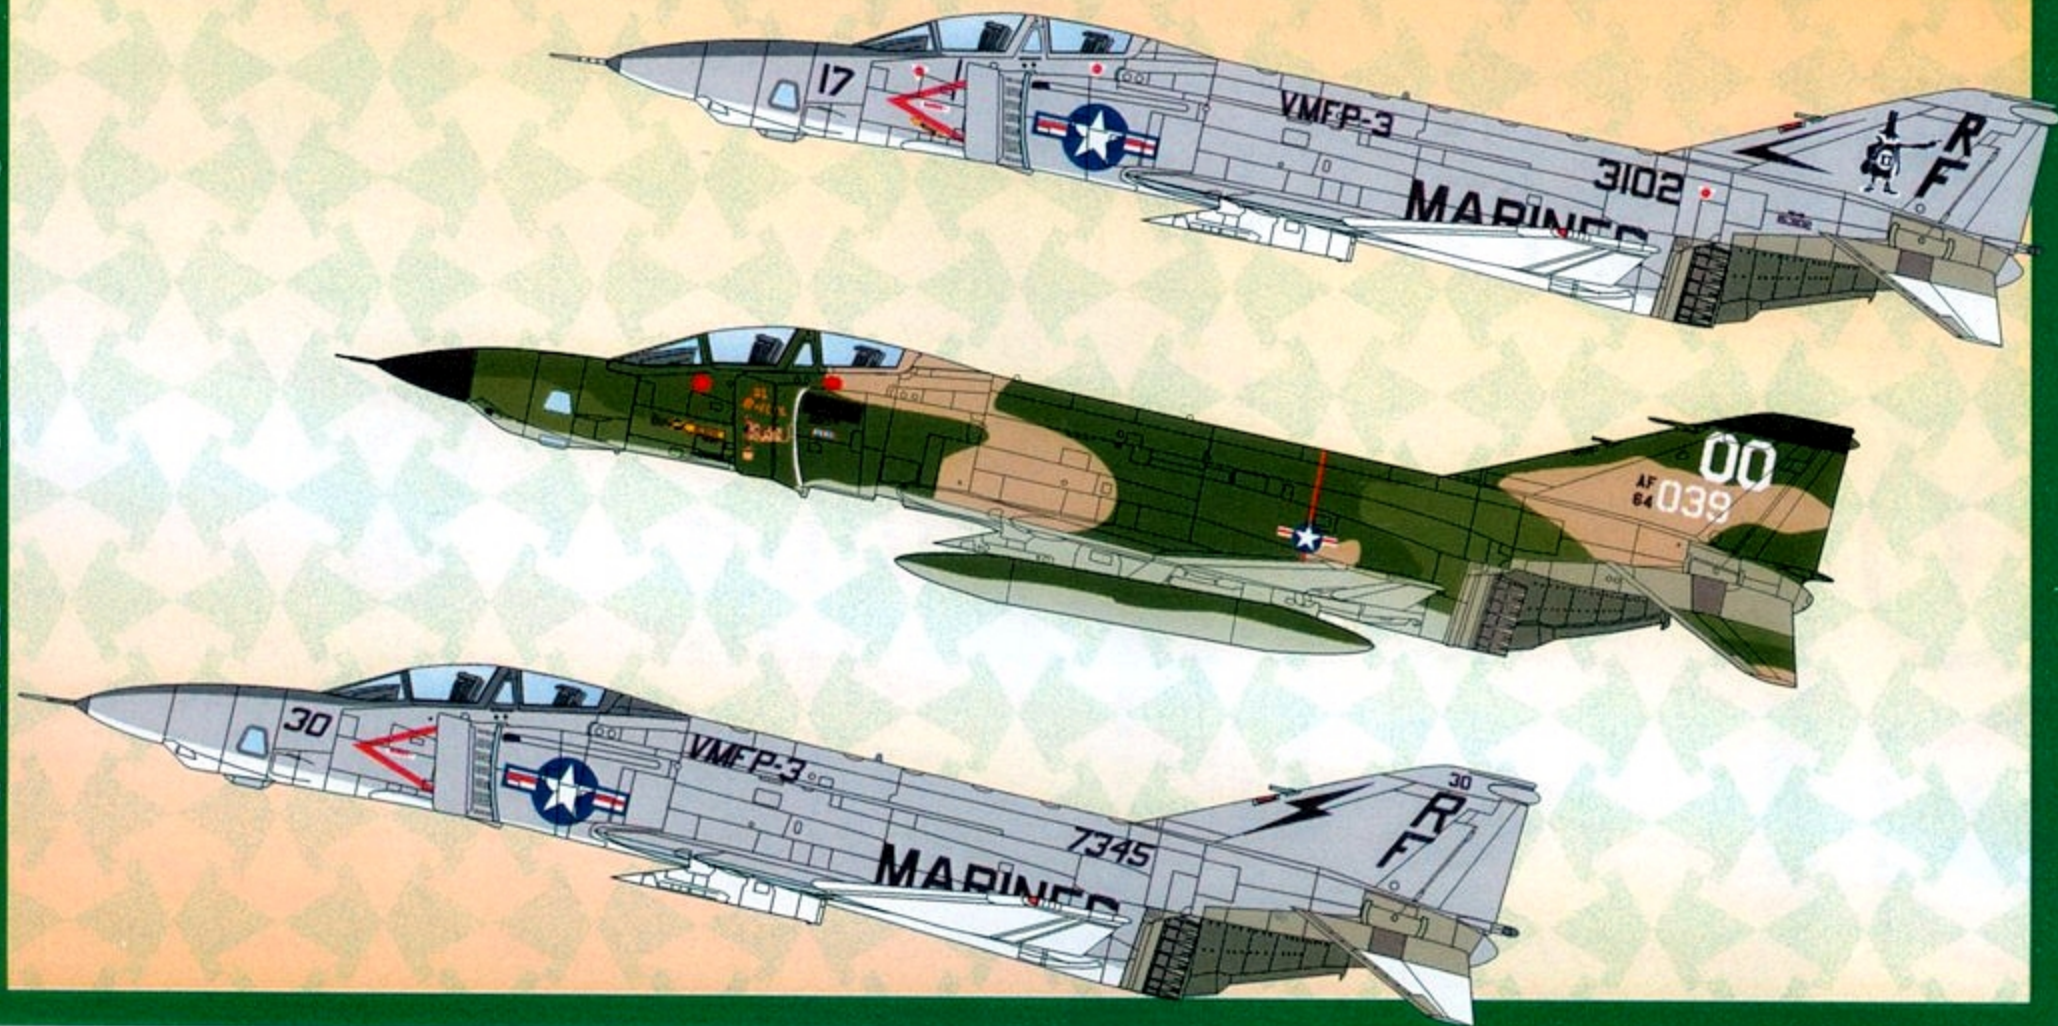


# Eyes in the Sky




Part II


Aircraft 1 - RF-4B BuNo 153102, VMFP-3, USMC, Oceana NAS, May 1982. Standard Gull Gray over White finish, Flat Black antiglare panel. NMF intake lips.

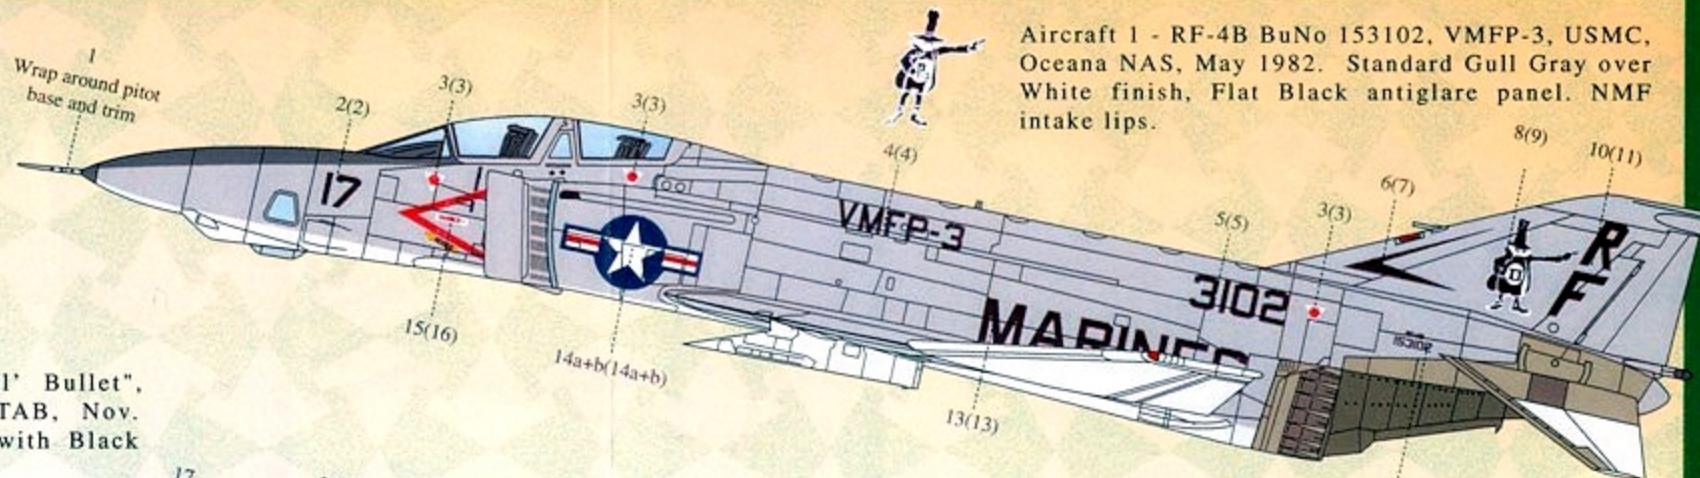

Aircraft 2 - RF-4C 64-1039 "Ol' Bullet", 11thTRS, 432nd TRW, Udorn RTAB, Nov. 1968. Standard SEA camouflage with Black tank tips and fin cap.

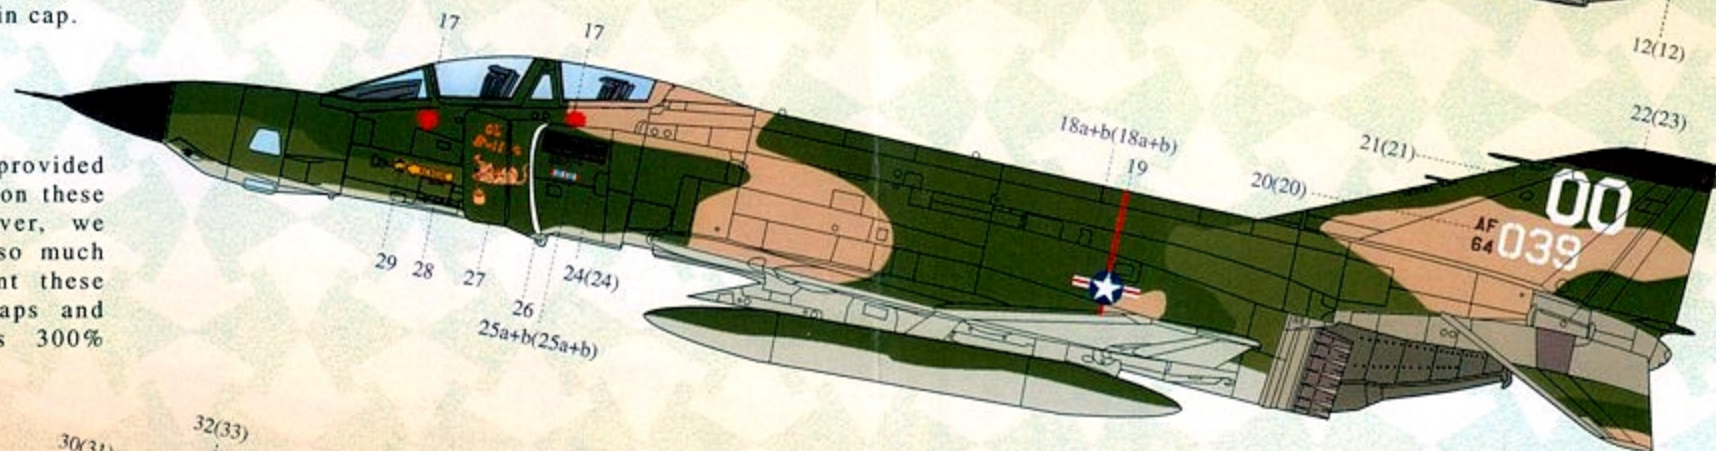

Fin caps are provided for some A/C on these sheets. However, we believe it is so much easier to paint these solid color caps and the result is 300% better. Try it!!

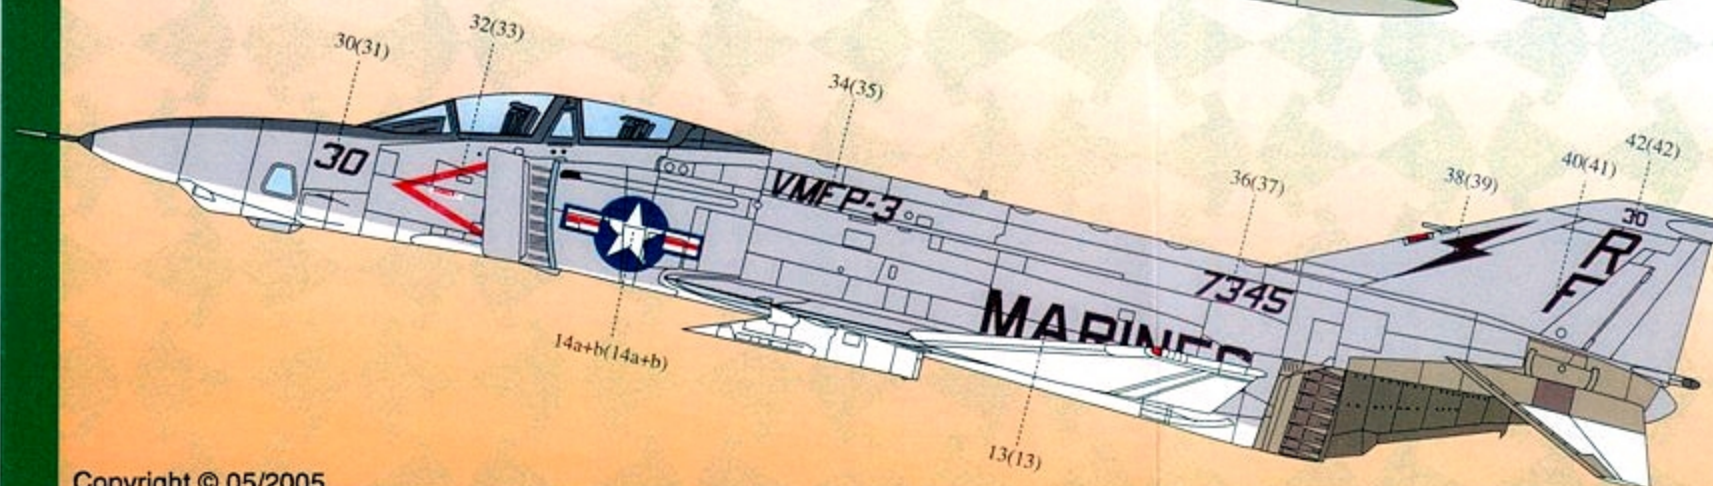


Aircraft 3 - A/C 3- RF-4B, BuNo 157345. VMFP-3, Mc Connell AFB, 6/90. Standard Gull Grey over White, with Flat Black Anti-Glare panel and canopy frames. Gull Grey fuselage cap on the rear.

**References:**

- Photos provided by Jerry Geer and Larry Davis.

**OUR THANKS TO THEM!!**

**NOTICE THIS A/C DID NOT HAVE  
WING SLATS!!**

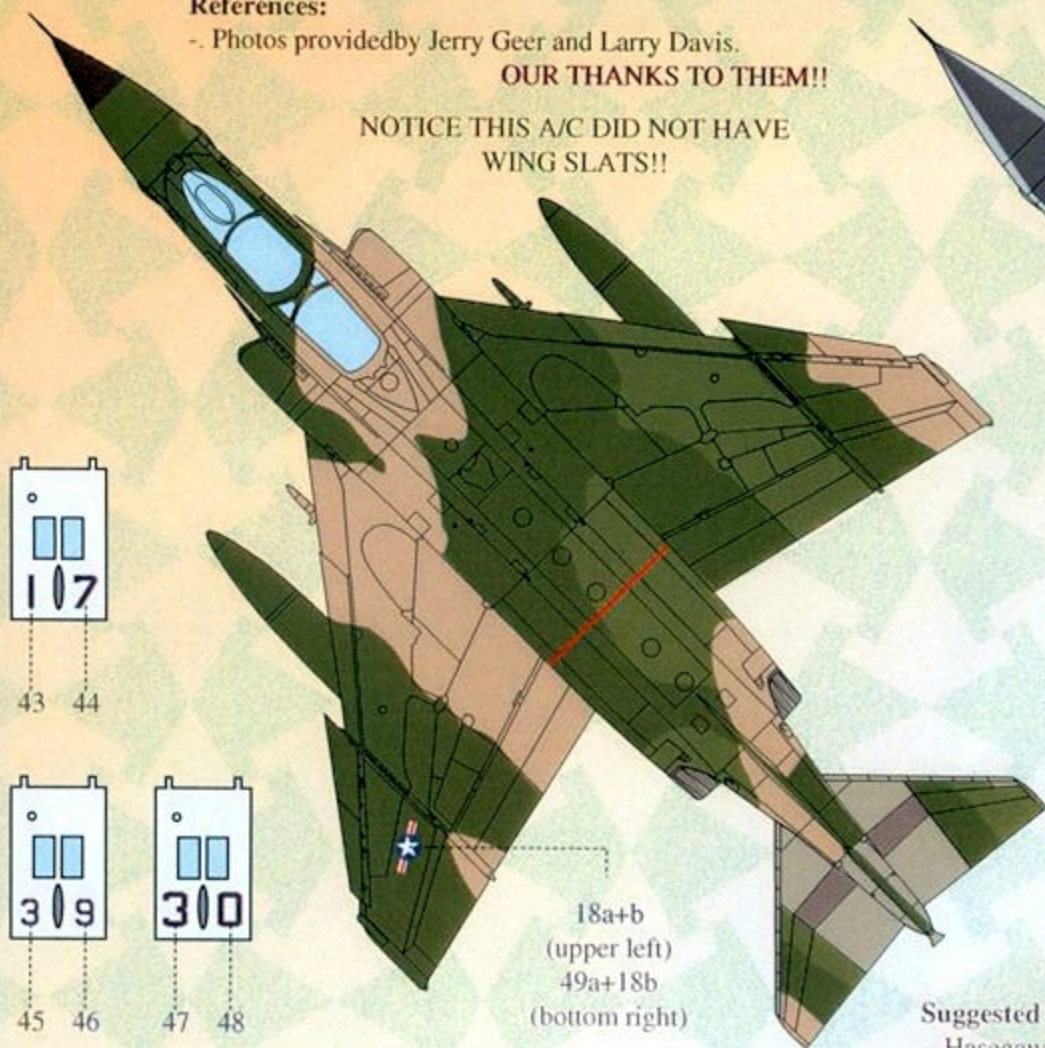

**Suggested Kit:**  
- Hasegawa RF-4 Family.



12902 SW 132nd ct, Miami, FL. 33186  
U.S.A.  
Ph: (786) 293-0411, Fax: (786) 293-5822.

**EAGLE STRIKE  
Productions**

Catch us on the net!



www.EagleStrikeProductions.com

**Decaling:** Apply decals only to a glossy surface.

1. With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
2. Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow

the setting solution to dry for about 3-5 minutes.

4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do **DO NOT TOUCH THE DECAL**, after this process until it is totally dry, preferably overnight.
5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).

**48198**