


F/A-18C Hornets of the Fleet Pt. I





F/A-18C Hornets of the Fleet Pt. I

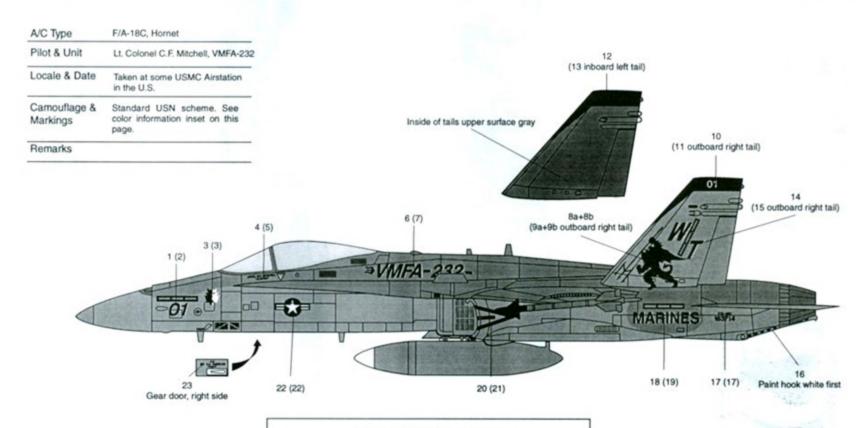


Color information on these Hornets:

The Hornets on this sheet are camouflaged as follows:


Upper Surfaces • FS 36320 Lower Surfaces • FS 36375 Vertical Fin Outer Surfaces • FS 36375 Vertical Fin Inner Surfaces • FS 36320 Radome Cap is natural fiberglass

Although contemporary Navy A/C weather and collect dirt and grime at an astounding pace, especially while at sea, keep in mind these colorful A/C are mostly CAG mounts or show birds, and as such received special attention from the ground crews. Very subtle weathering is recommended.

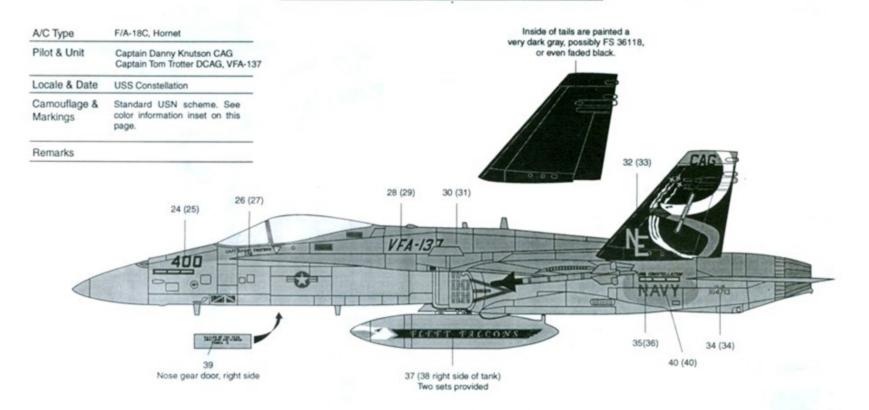



Productions
2025 S.W. 22 Terrace
Miami, Fl. 33145 U.S.A
fax (305) 285-7219

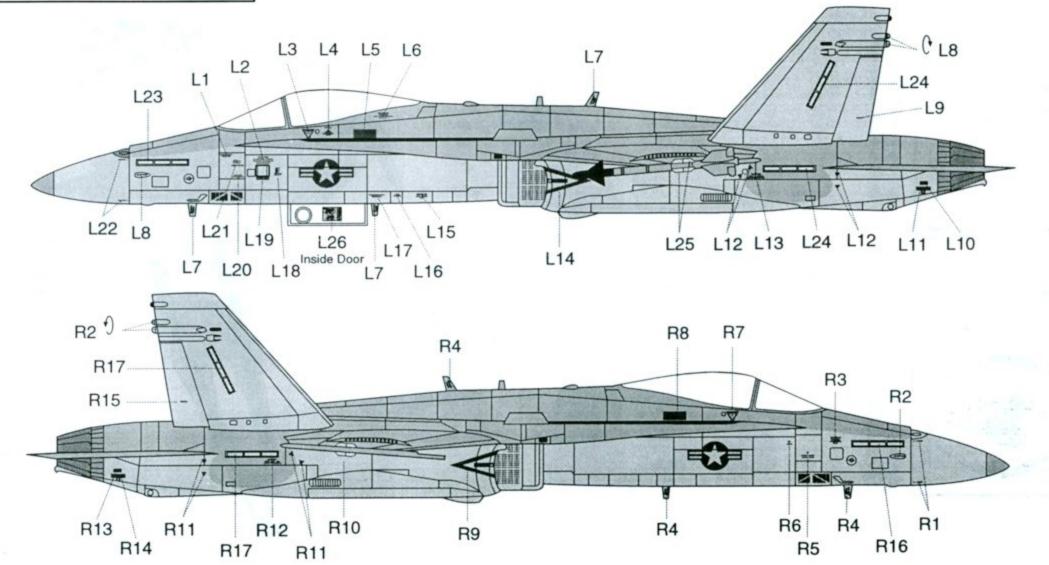





EAGLE STRIKE

Productions
2025 S.W. 22 Terrace
Miami, Fl. 33145 U.S.A
fax (305) 285-7219

48002 / 72018

48003 / 72019

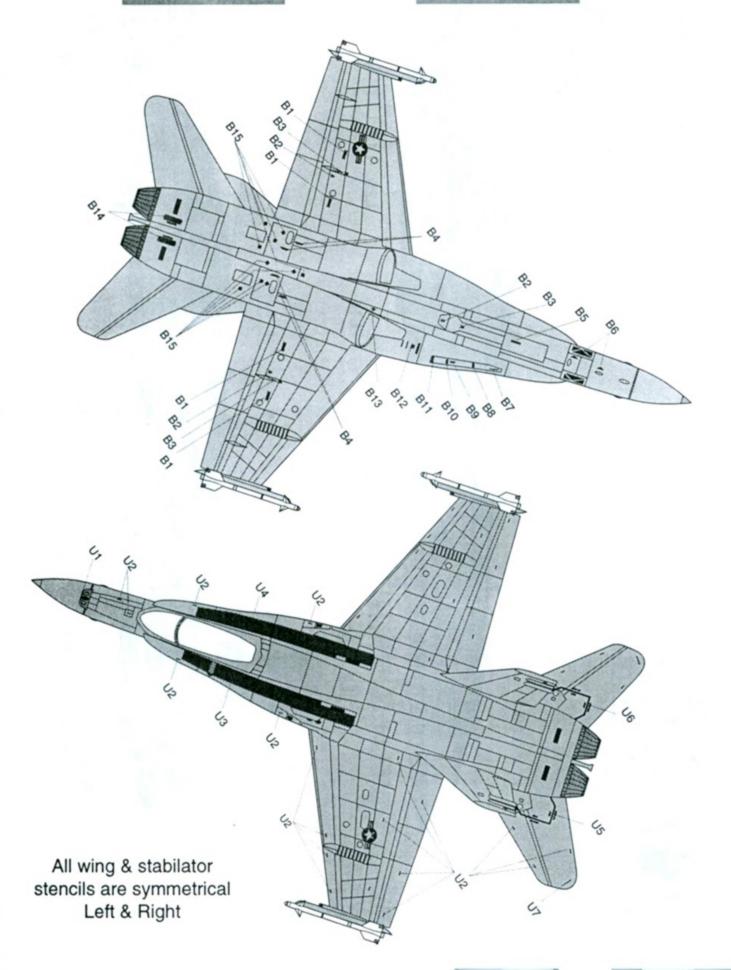

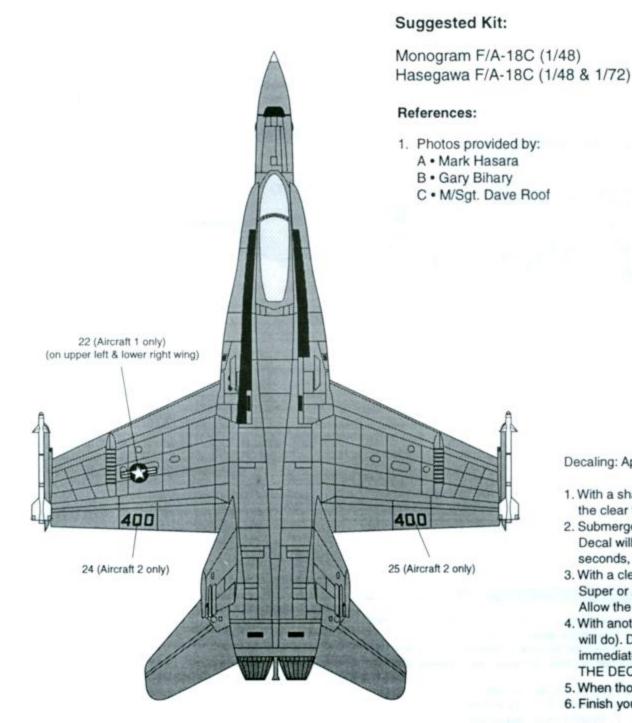

Modellers Note:

Notice that tailored parts are included to decorate the Revell/Monogram or Hasegawa kit of the F/A-18C. Items on the main sheet are for the Revell/Monogram model. Those on the second sheet (B) are for the Hasegawa kit. Simply use the appropriate version for the kit being used. Do lightly dismiss the not Revell/Monogram F/A-18C kit. With a little patience, a very good model will result.





FS 36375 Light Ghost Gray

Decaling: Apply decals only to a glossy surface.

- With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
- Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
- 3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow the setting solution to dry for about 3-5 minutes.
- 4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do DO NOT TOUCH THE DECAL, after this process until it is totally dry, preferably overnight.
- 5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
- 6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).