

## IMPORTANT! READ THESE INSTRUCTIONS FIRST.

Before you begin building your kit, read the instructions and study the illustrations carefully. Test fit the parts before cementing them together, to acquaint yourself with their proper location. It is best to cut the parts from the "runners" with a modelers knife instead of twisting them off. Cut the parts only as they're needed. Only paint and cement made for

styrene should be used. Trim off excess plastic or "flash". The plating should be scraped from chromed parts where they are to be cemented. Use cement sparingly. Apply cement to small parts with a toothpick. When painting your model it is best to cement all non-chromed parts to the body and paint the whole unit at one time.

CEMENT ----

DO NOT CEMENT -


CLEAR


PLASTIC PARTS


RED CLEAR PLASTIC PARTS


RED CLEAR

CLEAR

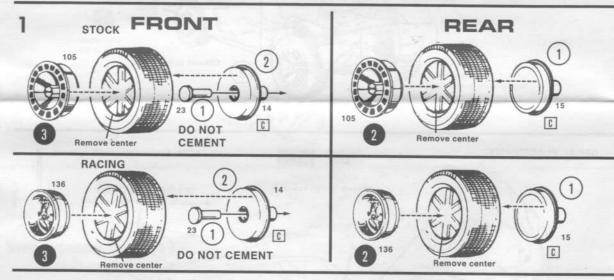


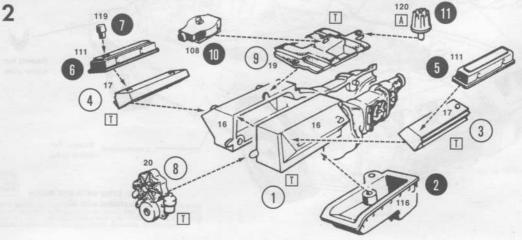


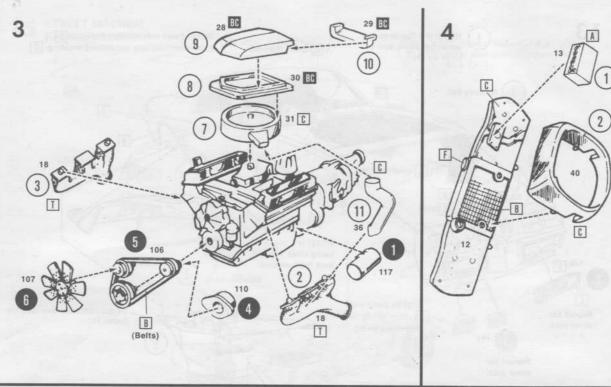

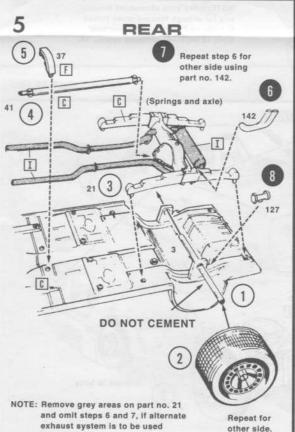


in assembly 7.

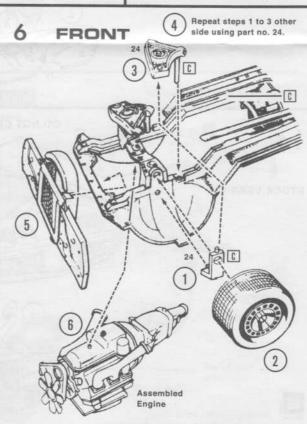

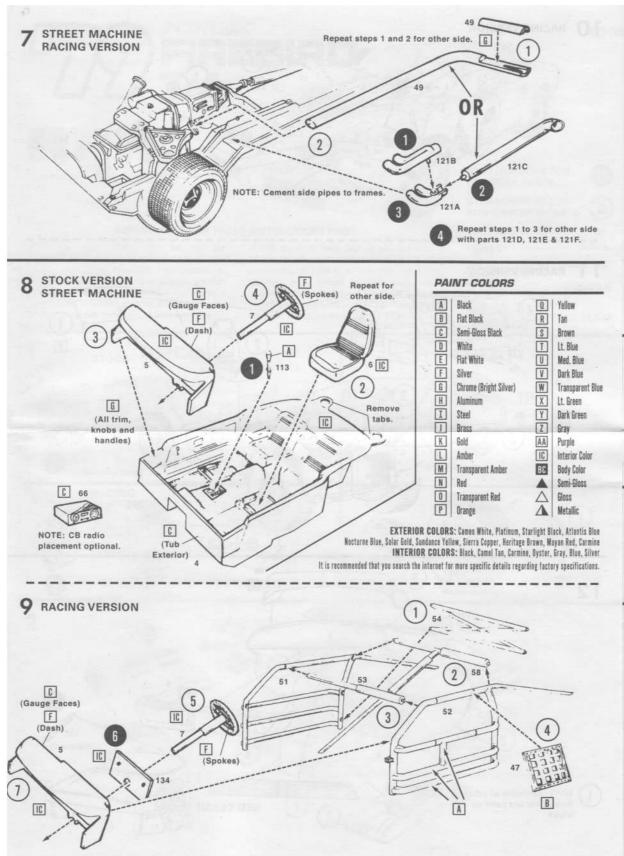

## 10 RACING VERSION

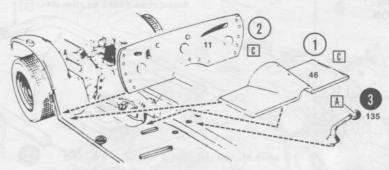

## 11 RACING VERSION

